
The response that you get back from the web service isn't a flat structure. The object has a property `results` with a value that is itself an object with three properties defined, each of which has a value that's another object. This data looks more like a tree, as shown in figure 4.3.

**Figure 4.3. Object as tree**

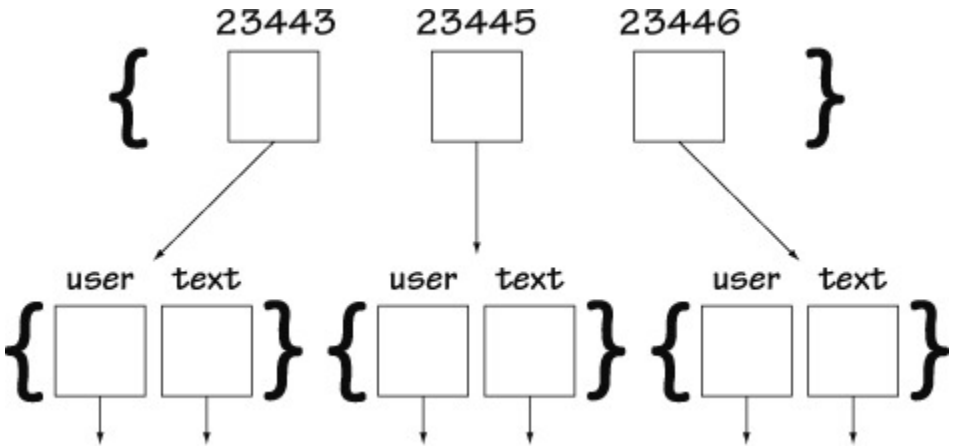


You'll frequently encounter tree structures when writing CoffeeScript programs. Not only is any JSON data received by your application a tree structure, but HTML documents, with their nested elements, are also trees.

#### Accessing values

For the `response` variable shown in listing 4.6, the value of the `results` property can be obtained with the familiar dot notation:

```
response.results

# { "23443":
#   { user: "Guard",
#     text: "Where\'d you get the coconuts?" },
#  "23445":
#    { user: "Arthur",
#         text: "We found them." },
#  "23446":
#   { user: "Guard",
#     text: "Found them? In Mercia?! The coconut\'s tropical!" }
# }
```