
Every time a function is invoked, some *object* is the receiver for that function invocation. In many cases, the receiver is unimportant to you, but when you're handling an event, the object that's receiving the event is important. When a function is handling a click event on an element in an HTML document, then the receiver is the element that was clicked, as shown in figure 4.4.

Figure 4.4. The receiver of a click event

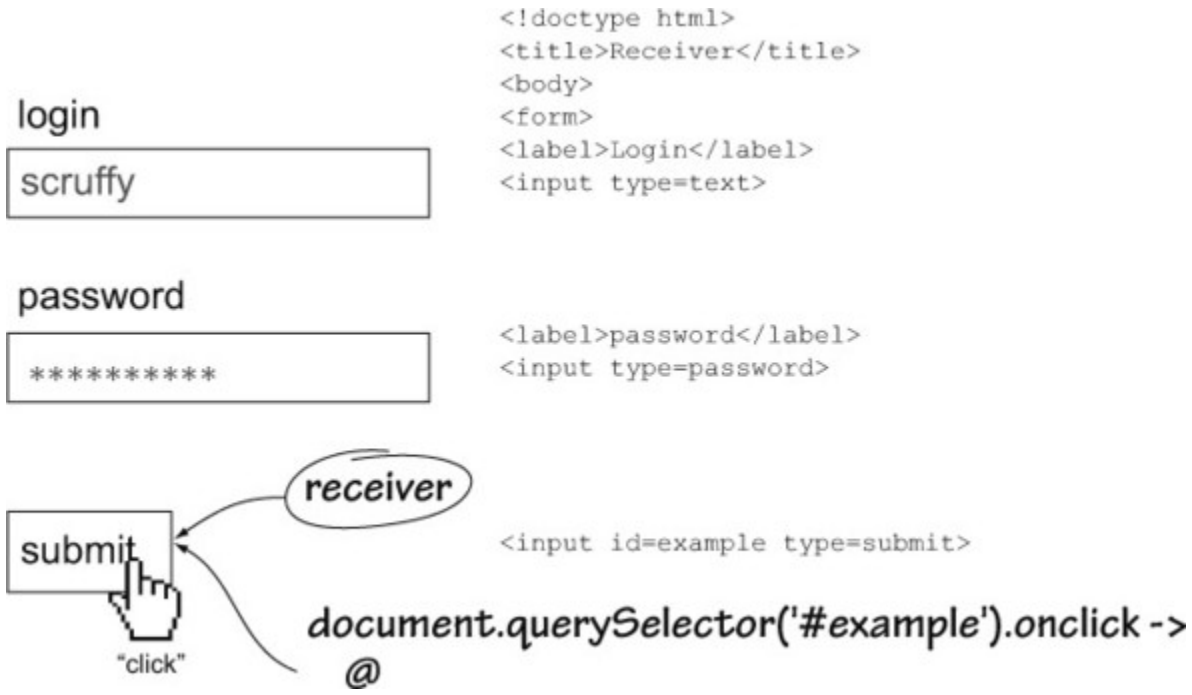

Inside the handling function, the receiver is available using the @ symbol or the `this` keyword. It can be helpful to think of @ in terms of the object you are *at* or `this` in terms of *this object* that is being used, right now.

Using the receiver, you can now rewrite the duplicated event handlers so that instead of having two handlers you can have just one. First, rewrite one event handler to use the receiver. Instead of this

```
someElement.onclick = ->
  someElement.innerHTML = 'Got clicked!'
```

it will look like this: