
invoked with that global object as the receiver. The question is, with a dynamic receiver object, how do you get a reference to your original object inside a function when it's used as a callback or otherwise called with some different object as the receiver?

Using scope

One way to get a reference to the element that you want is by using function scope. For example, the function that's being invoked by `setTimeout` is lexically inside the function invoked as the click handler. Closure means that any variables defined in the outer function will be visible to the inner function:

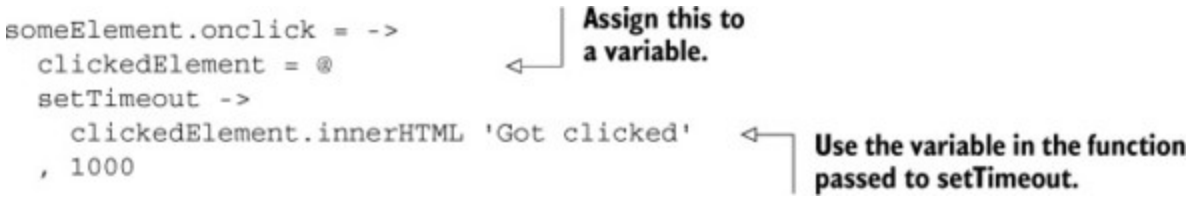

When you assign the `@` reference to a variable, the other function defined inside the scope has access to it.

Using the fat arrow

The fat arrow provides a way to keep a lexical reference to `this` without having to use an intermediate variable such as `clickedElement` in the previous example. Controlling the value of the receiver is called *function binding*. Using a fat arrow, you can rewrite the previous example:



The fat arrow causes the function to have `this` bound *lexically* at the point in the code where it appears. This has uses other than handling browse events, which you'll learn more about later, after you've learned more about objects.