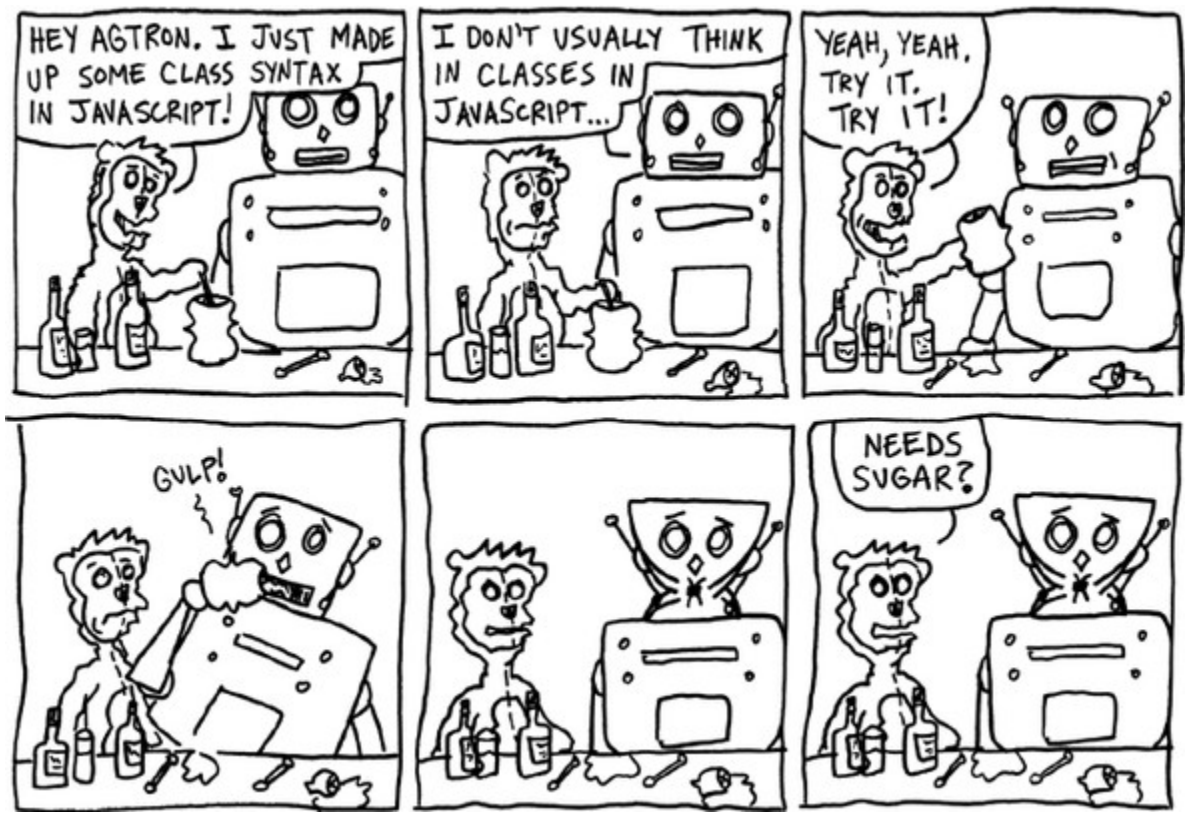


The syntactic sugar CoffeeScript provides for classes makes it easier to write classes in a language that's really prototype-based.

5.2.2. How does it work?

At this point you may expect a side-by-side comparison of CoffeeScript class syntax with the compiled JavaScript to show you what's going on. In this case, though, the raw JavaScript actually confuses the matter, so it's too early to think about the compiler. Instead of looking at everything the compiler does, consider a `product` object:

```
product =
  render: ->
  purchase: ->
```

This `product` object has two properties. How do you make lots of them? With a function.