
```
logUserDataFor = (user) ->
  dbRequest = (attempt) ->
    users.get user, (error, data) ->
      if error and attempt < 5
        setTimeout ->
         (dbRequest attempt + 1), 1000
      else console.log 'Got the data'
  dbRequest()
```

That’s not the end of your woes. It’s not just the users database that suffers timeouts. Suppose that all the databases suffer timeouts, and worse, other services that your program relies on have timeouts too. Instead of writing the same thing repeatedly, create an abstraction that can retry a failed request for any callback-based service:

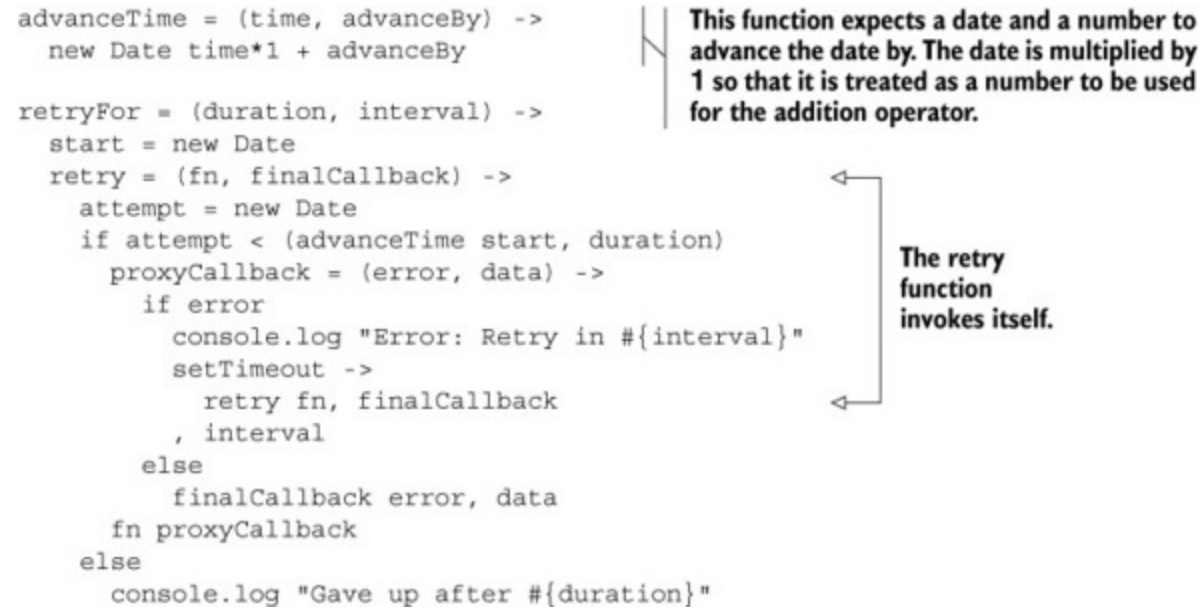

The `retryFor` function returns a function that takes a single function argument and expects to be able to invoke that function attachment with a callback. To use the `retryFor` function to load user data, you first need to create a function that has all other arguments applied except the callback:

```
seconds = (n) ->
  1000*n

getUserData = (user) ->
  (callback) ->
    users.get user, callback
```