
7.1.1. Rest

The rest parameter puts multiple function parameters into an array.[1] A rest parameter is a name followed by an ellipsis (three dots), and it can be used to create a better `highlight` function:

[1] If you're familiar with Ruby or Perl, you might be familiar with the splat, which serves the same purpose.

```
highlight = (names...) ->
  for name in names
    color find(name), 'yellow'
```

When the `highlight` function is invoked, then `names` is an array containing as many elements as there are arguments:

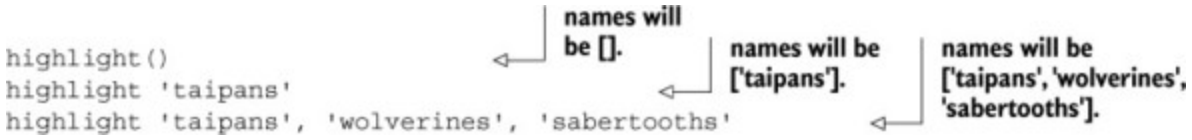

Suppose now that you want the `highlight` function to color the first team (identified by the first parameter) gold and color all the other teams (identified by the other parameters) blue. How do you do that? By putting the ellipsis on the second parameter:



Using rest parameters, you can convert multiple function parameters into a single array. Using *spread* parameters, you can do the reverse—convert a single array into multiple parameters.

7.1.2. Spread

Now that the `highlight` function takes individual arguments, what do you do when you have an array of names? Suppose you have the teams