
```
I = (x) -> x

I 2
```

These common cases where parentheses are implicit and should be added are easy to see:

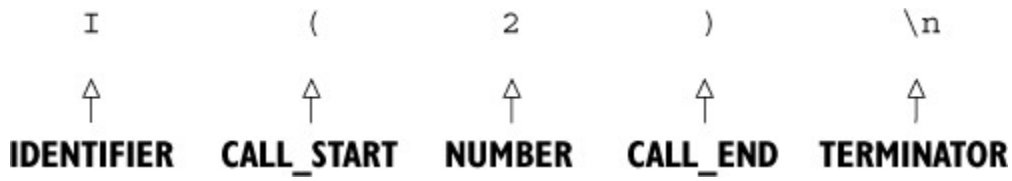

But more complicated examples can be difficult to discern. How do you tokenize this doozy?

```
f ->
  a
.g b, ->
  c
.h a
```

Probably you *don't* tokenize it because you avoid writing code like that. Although you have the option to avoid writing ambiguous code, the compiler doesn't have the same luxury. It must reliably accommodate the different styles, edge cases, and incidentally complex syntax of many programmers. Thus, the full rewriter for braces and parentheses is complicated. Finally, postfix conditionals need some special treatment by the rewriter.

Postfix

A postfix conditional such as `play 'football' unless injured` is convenient syntactic sugar but it poses a problem for the compiler, because it reads backwards. To deal with this, the CoffeeScript compiler tags postfix conditionals:

