
on the event loop once the file has been read. Again, the function you supply is the handler that will be invoked when the event occurs:

```
fs.readFile 'myFile.txt', (err, data) ->
  console.log 'invoked as the handler when the event occurs'
```

Because an asynchronous file read occurs outside of the event loop, the time it takes for the response to come back doesn't affect the event loop. Other events can be handled and other computations can be done until the response comes back. In figure 9.1 you can see other events being handled as they arrive on the event loop while asynchronous requests are requested and the results are awaited.

Figure 9.1. Asynchronous I/O doesn't block the event loop.

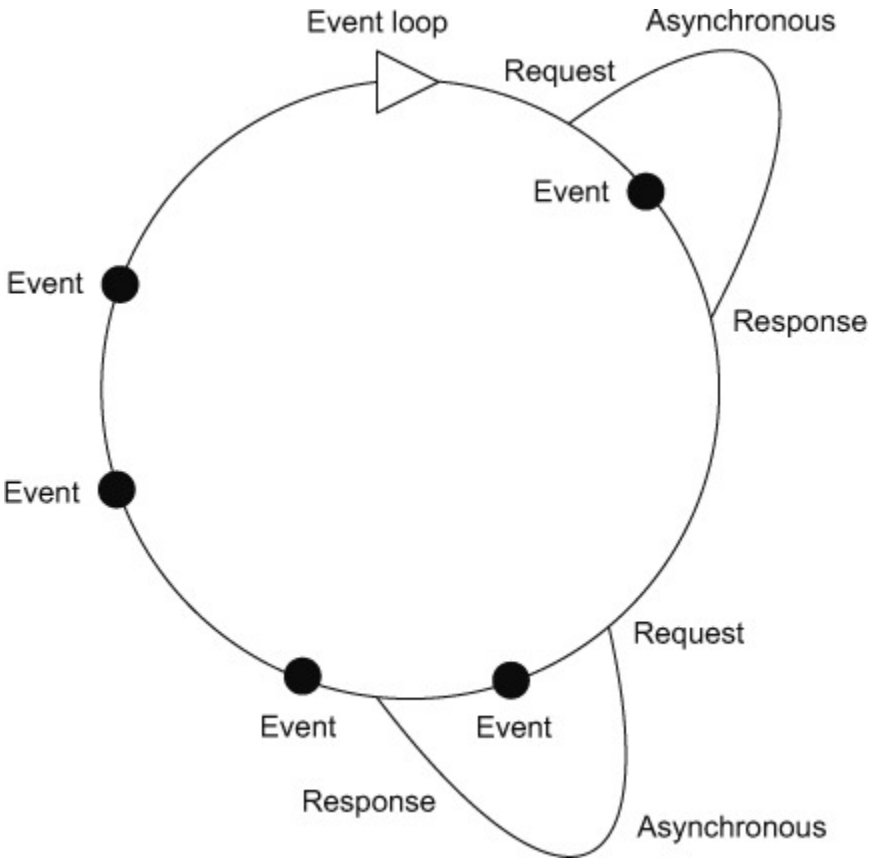

An event loop like the one in figure 9.1 is in good shape because nothing is blocking it. If it takes 2 seconds to get a response for a request back from a web service somewhere on the other side of the world, that doesn't matter