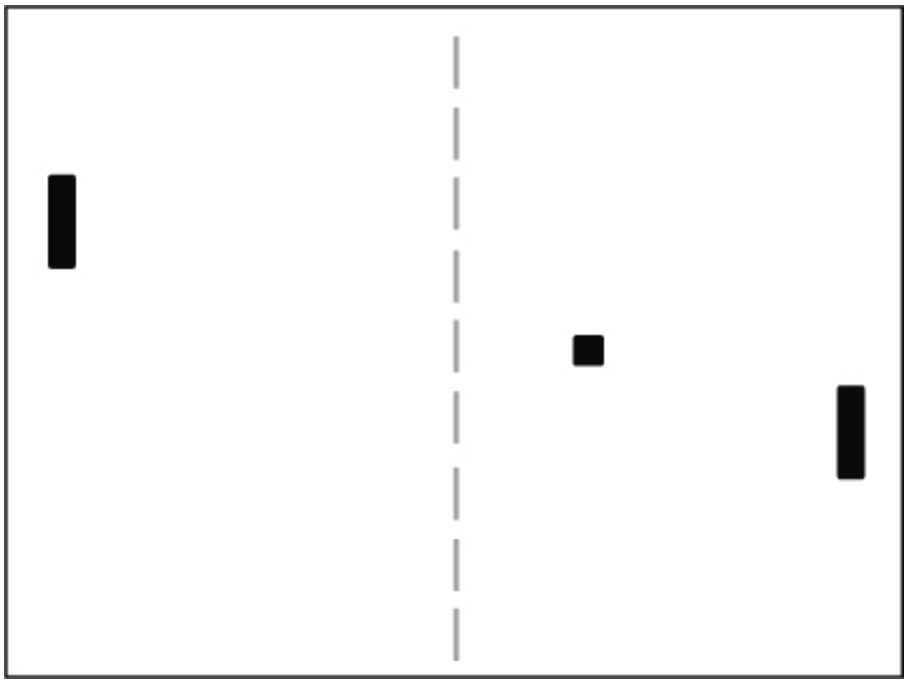


User data doesn’t stop until the game stops, so it’s effectively infinite. How is it processed?

9.3.1. User events

Anything that’s done asynchronously on the event loop (like reading a file) causes an event to be triggered when it’s done. There’s another important type of event that you don’t request (not directly anyway) but that you definitely want to listen to and handle. That type of event is the user event.

How do you handle user events in a CoffeeScript program? By attaching a handler to them. For example, start by attaching an event handler for `keydown` events: