
When the program in listing 9.3 is executed, the events generated by `setInterval` aren't forced to wait long for the event loop. Note that for this program to run, you'll need a competitors.15000.txt file in the same format as the previous competitors files:

```
> coffee 9.3.coffee
There are 1468 competitors
There are 2937 competitors
There are 4406 competitors
Tick at 0.121
...
```

Now that the data is being loaded as a stream and sorted as it arrives, the processing is broken up into multiple blocks. This means that the event loop isn't blocked for a long, continuous time. Instead, the event loop is blocked for multiple smaller chunks of time, as shown in figure 9.5 and by comparison to figure 9.3.

Figure 9.5. Don't wait forever. Treat input as a series of events and process it as it arrives.

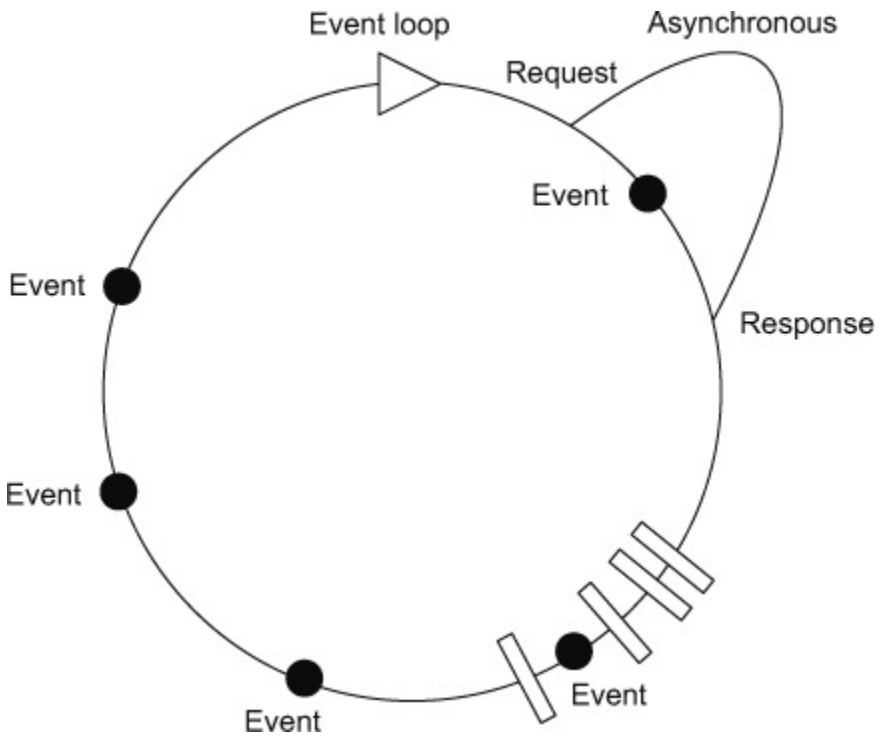

There's only one event loop, and *the event loop is the wrong place to do data processing*. It's reasonable to do some processing to generate