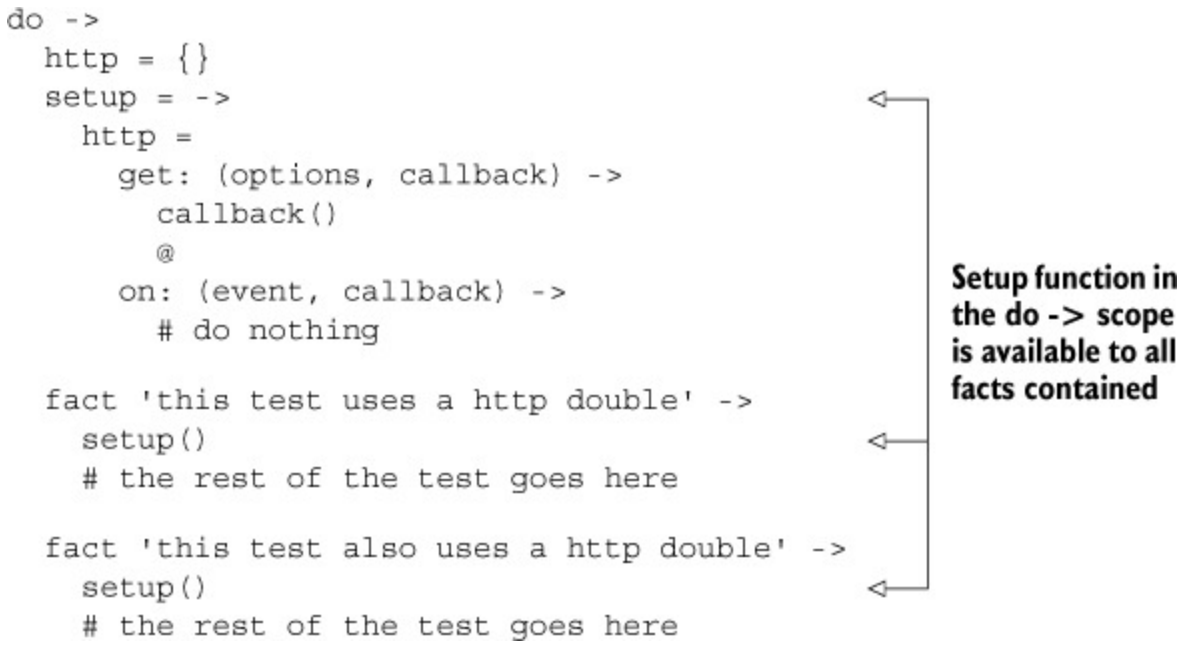


Similarly, when each test is finished, you might need to clean up after yourself by extracting the cleanup work to a `teardown` function that's invoked after each test.

With setups and teardowns, you've tidied things up inside test files. How about multiple test files—how do you deal with those?

10.6.2. Test helpers and runners

You still have to run your test files individually. To test three modules, you must invoke three test files:

```
> coffee word_utils.spec.coffee
# OK

> coffee tracking.spec.coffee
# OK

> coffee another.spec.coffee
# OK
```

This is annoying. When there's only one file to test, it's almost bearable, but what about when there are 10, 100, or 1,000 test files? To be confident that