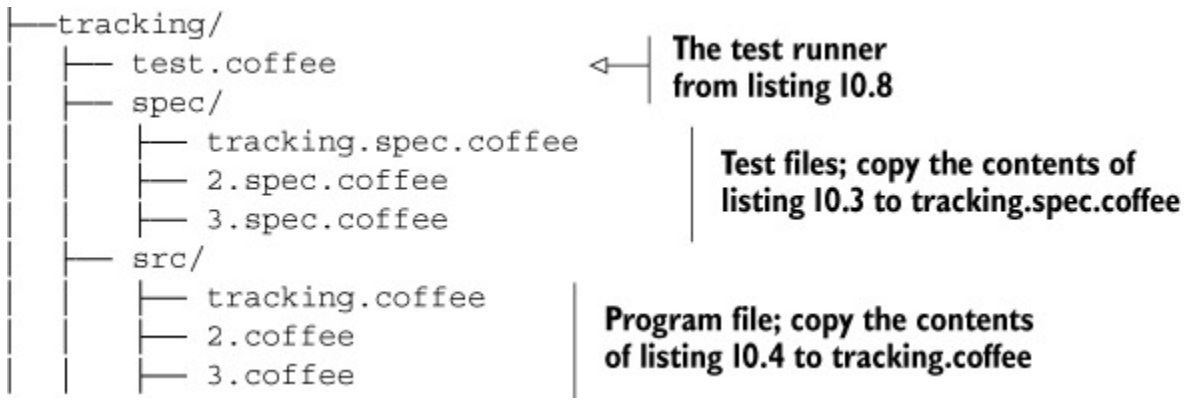


Move the test (or spec) files to a spec folder and the program source files to an src folder, keeping them clearly separated. When you do this, you'll also need to update any require paths.

When the test.coffee file is executed, all of the tests in the test directory run and report the result:

```
> coffee test.coffee
```

Instead of invoking it using the `coffee` command, you can change test.coffee into an executable script, allowing the tests to be run without invoking `coffee` directly on the command line:

```
> ./test
```

An executable script is easier to integrate with other programs. Be sure to make the script executable. The exact method of doing this depends on the platform you're running on. Here is a simple shell script for *nix-based systems that assumes CoffeeScript is installed:

```
#!/bin/bash
set -eu

TEST_DIR=$(dirname "$0")

main () {
  coffee test.coffee
}

main "$@"
```

A simple bash script for running a CoffeeScript program in test.coffee