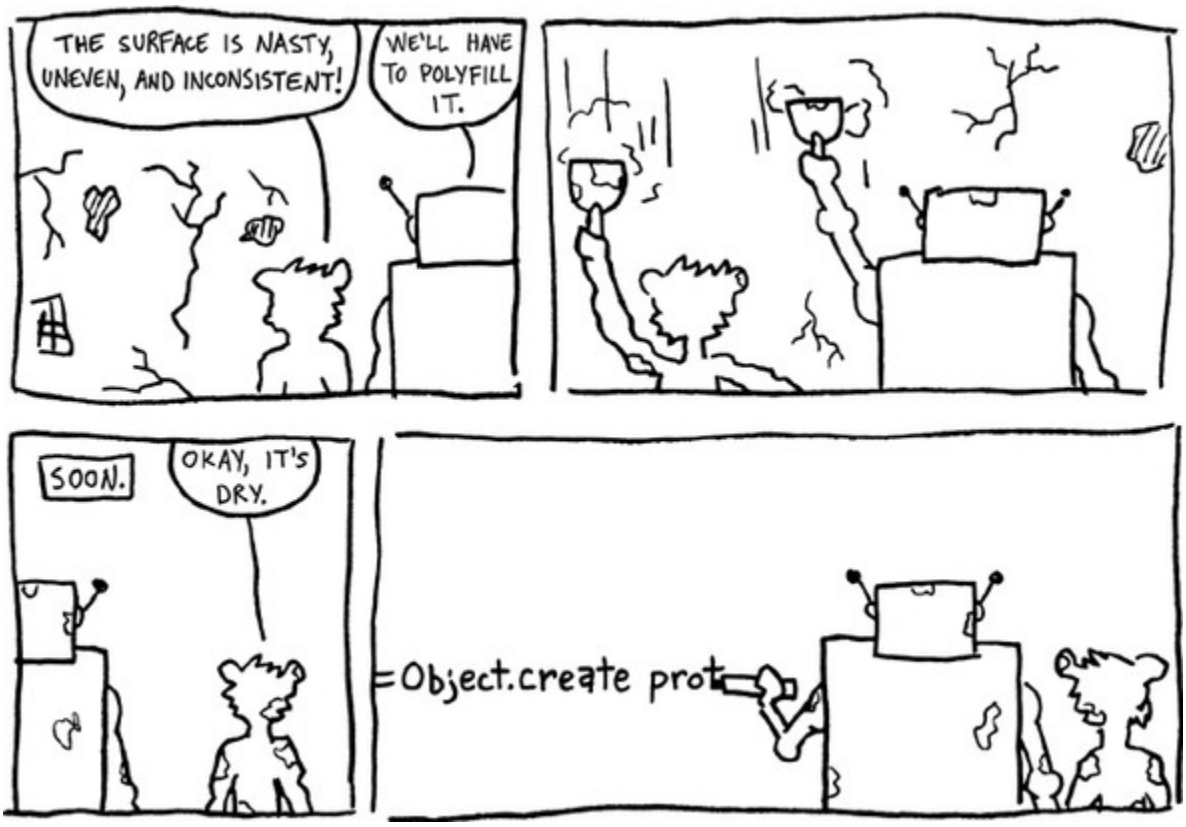


Your first polyfill is for the `document.querySelector` that doesn't work in Browser X. You use the method to find an element using an ID, so a reasonable first polyfill for your needs relies on `document.getElementById`. The trick is to define the method only if it doesn't already exist:

```
document.querySelector ?= (selector) ->
  (document.getElementById (selector.replace /^#/gi, ''))
```

Define document .querySelector only if it doesn't already exist.

But suppose that once you've defined `querySelector`, another programmer (such as Scruffy) comes along and, quite reasonably, expects it to work according to the specification. What happens when Scruffy tries to use your polyfill to find an element using the class name?

```
<ul class='pages'>
  <li></li>
  <li class='active'>Home</li>
  <li>About</li>
```