
```
bar.style.height = 20
```

To animate this to a height of 40 in one second, use `setInterval` and increase the height by 1 pixel until the element reaches the target height:

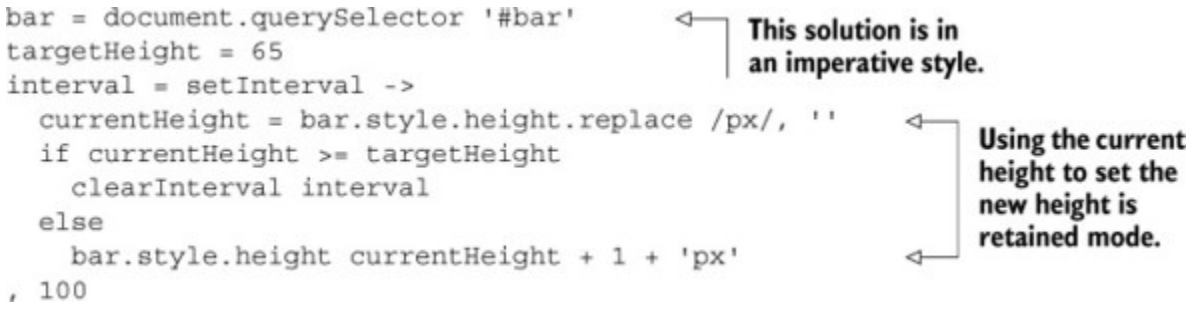

A named abstraction adds some clarity:

```
animateStyleInPixels = (element, propertyName, targetValue) ->
  interval = setInterval ->
    currentValue = element.style[propertyName].replace /px/, ''
    if currentValue >= targetValue
      clearInterval interval
    else
      bar.style[propertyName] = currentValue + 1 + 'px'
  , 100

bar = document.querySelector '.bar'
animateStyleInPixels bar, 'height', 65
```

That’s all there is to basic animation in retained mode. Instead of moving things to their destinations immediately, you animate (tween) them from the start state to the end state. How does animation in immediate mode look different?

11.5.2. Immediate mode

Immediate-mode animation is like a flipbook or cell-based animation with each frame being a standalone static image. By rapidly flipping through the frames (the pages of the flipbook), you create the appearance of movement. When the frames change faster than the human eye can detect, the animation appears smooth. In the next listing, you see a program for a 30-frames-per-second immediate-mode graph.