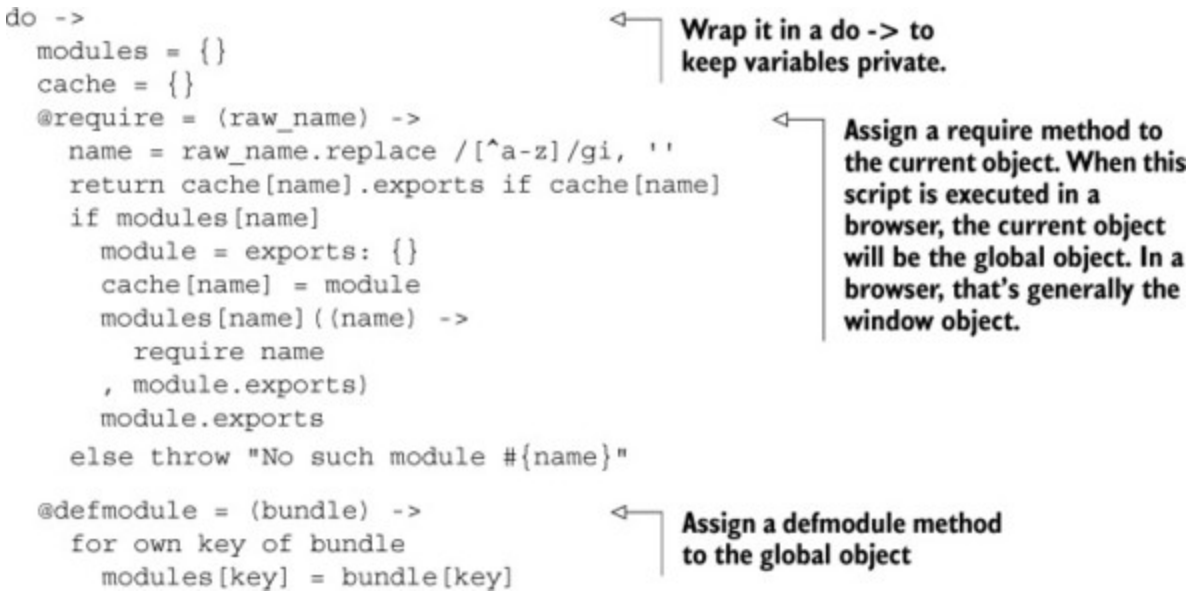


So how does it work? When you load a module, the `require` invocations trigger other modules to be evaluated, which in turn will cause any `require` invocations in that module to be evaluated. The application will need to load one module that will load all of the others. The overall structure of the compiled output will have a single `require` call at the end to invoke this module:

```
defmodule('comments': function(require, exports) {
  class Comments
  exports.Comments = Comments;
});

defmodule('main': function(require, exports) {
  var Comments = require('./comments').Comments;
});

require './main'
```

You now have to write the Cake task that compiles your CoffeeScript modules from separate files into a single JavaScript file that includes the module library from listing 12.13 and wraps each module in a `defmodule`. This Cake task appears in the next listing. This task is suitable for compiling your small project. If your project becomes large (thousands of modules), then you might need to revisit it.

Listing 12.14. Cake task for client-side modules