
The new problem Agtron has given you and Scruffy is to improve Formulaic so that a change from the server is reflected in the form. This means that a change to the object representing the form needs to trigger an update in the form:

```
form = new Formulaic document, '#contact-details'
form.fields['first-name'] = 'Tyrone'
```

You *could* get Formulaic to poll the field properties. You could, but you don't have to. Why? Well, *until now* you've treated all object properties as having just a name and a value:

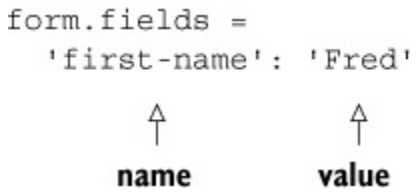

With ECMAScript 5, though, properties don't have just names and values; they also have *descriptors*. The property descriptors are `value`, `get`, `set`, `configurable`, `enumerable`, and `writable`. The `get` and `set` descriptors are commonly known as getters and setters.

Getters and setters

Consider the `'first-name'` property of `form.fields`. Until now, when a property value is changed, that's the full extent of it, and you'd better like it. With a `set` property descriptor, though, you can create a property *and* define what happens when a new value is assigned to it! One way to do that is with `Object.defineProperty`:

```
Object.defineProperty form.fields, 'first-name',
  set: (newValue) => @root.getElementsByName('first-name')[0].value
= newValue
```

For Formulaic, a `get` property descriptor means you don't need to poll the form fields for changes. Instead, you can define a function that gets the latest value from the form field any time the object property is accessed: