
functions will fit on one line. If the function body requires multiple lines, then you put the function body underneath, with each line of code indented one level. Refer to figure 3.1.

Figure 3.1. Anatomy of a function

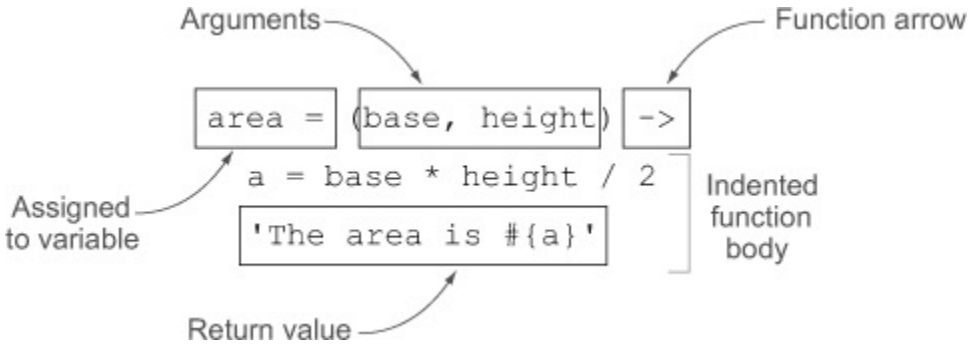

Invocation

When you write the variable name of a function followed by one or more values, then the function is invoked:

```
countWords 'north,east,south,west'
# 4
```

Any function is invoked when followed by parameters or parentheses, even a function that's not assigned to a variable:

```
(-> 42)()
# 42
```

The significance of this odd-looking bit of syntax is explored later in the chapter.

Arguments

A function takes any number of values as arguments with a comma separating each argument from the next. These arguments specify values for the function parameters. Why do you need more than one argument? Well, consider a string of words separated by colons:

```
beerStyles = 'Porter:Pilsner:Stout:Lager:Bock'
```