```
xhr.setRequestHeader('Timezone-Offset',
                     new Date().getTimezoneOffset());
xhr.setRequestHeader('Sample-Source',
                     'CORS in Action');
xhr.onload = function() {
...
```

When you reload the client page, none of the posts will load, and you'll see an error message similar to the one you saw with the `DELETE` method, as shown in figure 4.14. Only this time the error is about the new headers and not the HTTP method. If you inspect the request in the Network tab as shown in figure 4.15, you can see that the preflight request has a new Access-Control-Request-Headers header with the additional header values.

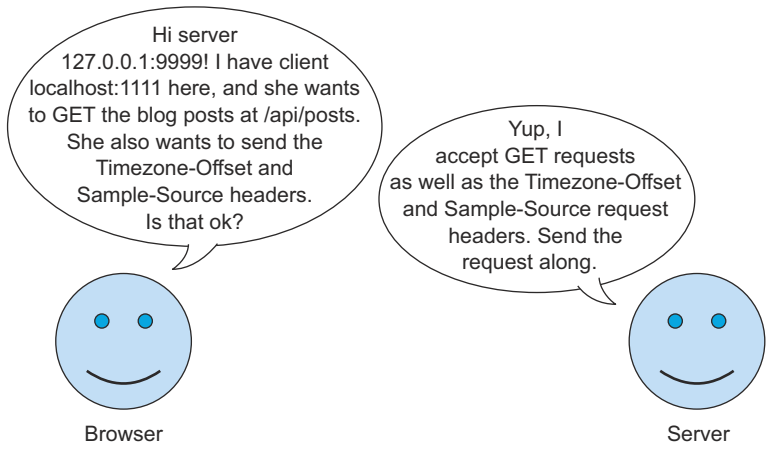


Figure 4.13 Conversation between browser and server for additional headers

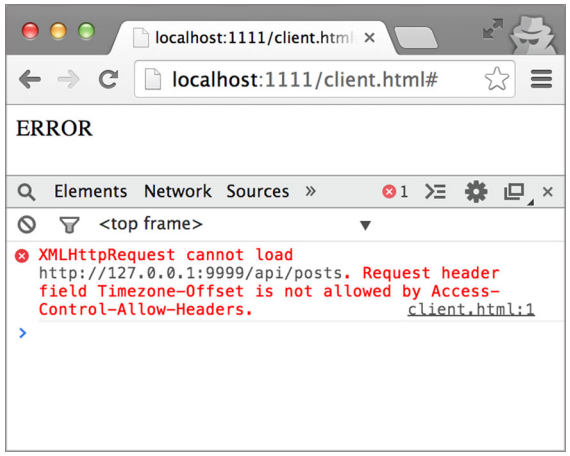


Figure 4.14 Error when trying to add additional headers to a request