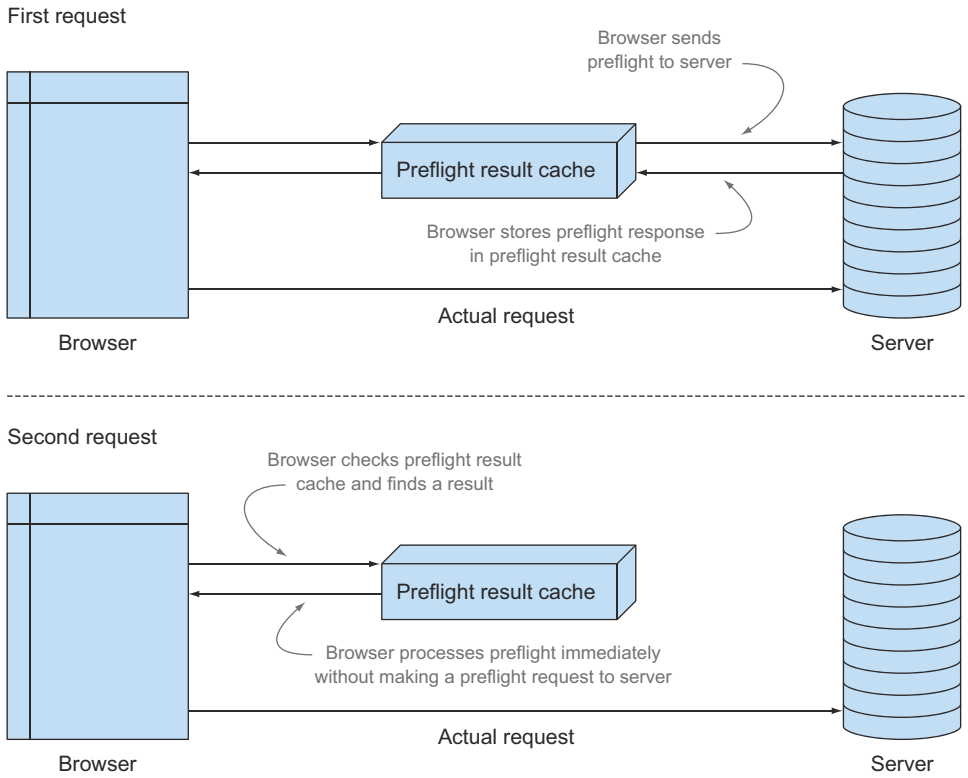



**Figure 4.21 Using the preflight cache. The first request sends a preflight to the server, but the second request grabs the preflight response from the preflight cache.**

You can see the preflight cache in action by reloading the page a few times. The first time you reload the page, you'll see the preflight `OPTIONS` request in Chrome's Network tab. But subsequent reloads will skip the preflight request and go straight to the actual request. Figure 4.22 shows three `GET` requests fired one after the other, with only one preflight request. The preflight is sent for the first request only; the other two requests take advantage of the preflight result cache.

> **NOTE** To isolate just the CORS requests in figure 4.22, I selected the Preserve Log Upon Navigation option, which is the fifth icon from the left along the bottom of the console log. I also selected only to show XHR requests, so the requests to client.html are filtered out.

The cache stores entries by URL plus origin. Requests from different origins to the same URL all have different cache entries. Likewise, requests from the same origin to different URLs all have different cache entries. Because the preflight result cache can only store entries based on origin and URL, you can't take shortcuts and specify a preflight response for an entire domain. Each URL in your domain that supports CORS will need to be able to respond to a preflight request.