```
res.set('Access-Control-Allow-Credentials', 'true');
if (isPreflight(req)) {
  . . .
} else {
  res.set('Access-Control-Expose-Headers', 'X-Powered-By');
}
```

Sets Access-Control-Expose-Headers header on the actual response

NOTE The Access-Control-Expose-Headers header need only be included if the request isn't a preflight request. This is because the header only takes effect on the actual request. It doesn't hurt to put it on the preflight, but it doesn't provide any benefit either.

After making the changes in listing 5.6 and reloading the sample, the X-Powered-By header should be displayed on the page, as shown in figure 5.9.

Simple response headers

Not all response headers need the Access-Control-Expose-Headers header. Some response headers are always visible to the client, regardless of whether or not the Access-Control-Expose-Headers header is present. These headers are called *simple response headers*. There isn't any documented reason why these specific headers are special; they are just the result of the evolution of the web over many years. The simple response headers are defined as:

- Cache-Control
- Content-Language
- Content-Type
- Expires
- Last-Modified
- Pragma

The server doesn't need to do anything for the client to view these headers. The client can always read these response headers.

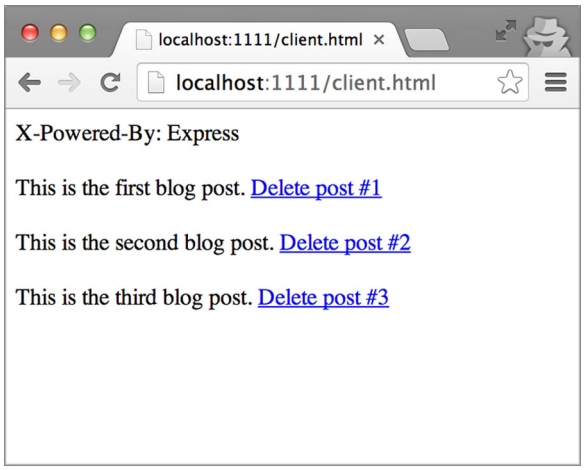


Figure 5.9 Displaying the X-Powered-By response header on the page