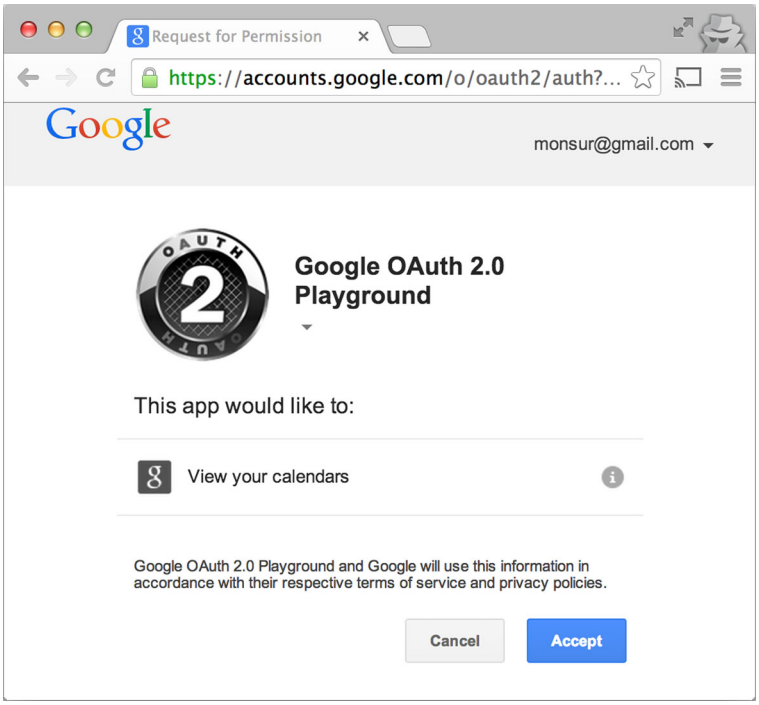


Figure 6.12 Example of a Google authorization page asking for your permission to share your calendar data with a third-party app

simple request header, it will always require a preflight request, even on GET and POST requests. Table 6.3 shows an example of making a request with an Authorization header. The Authorization header carries the token in the request. The request requires a preflight request because Authorization is a custom header.

Adding support for OAuth2 is beyond the scope of this book. It can be a difficult technology to work with, but luckily there are libraries for most major server languages.

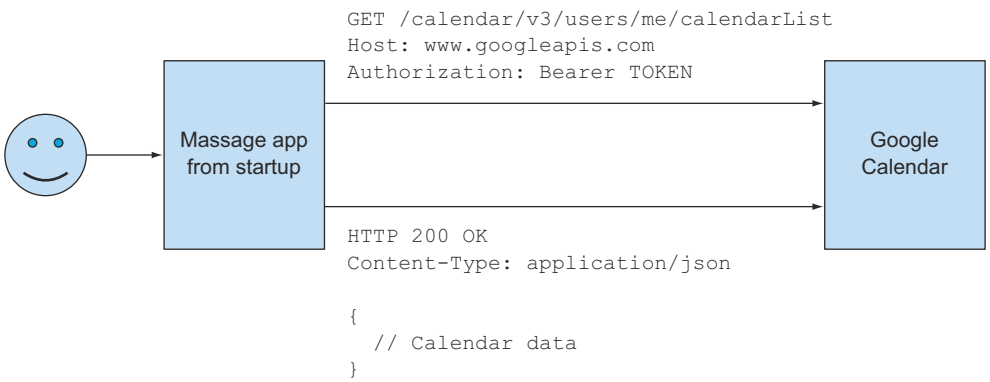


Figure 6.13 Making an authorized request to the Google Calendar API