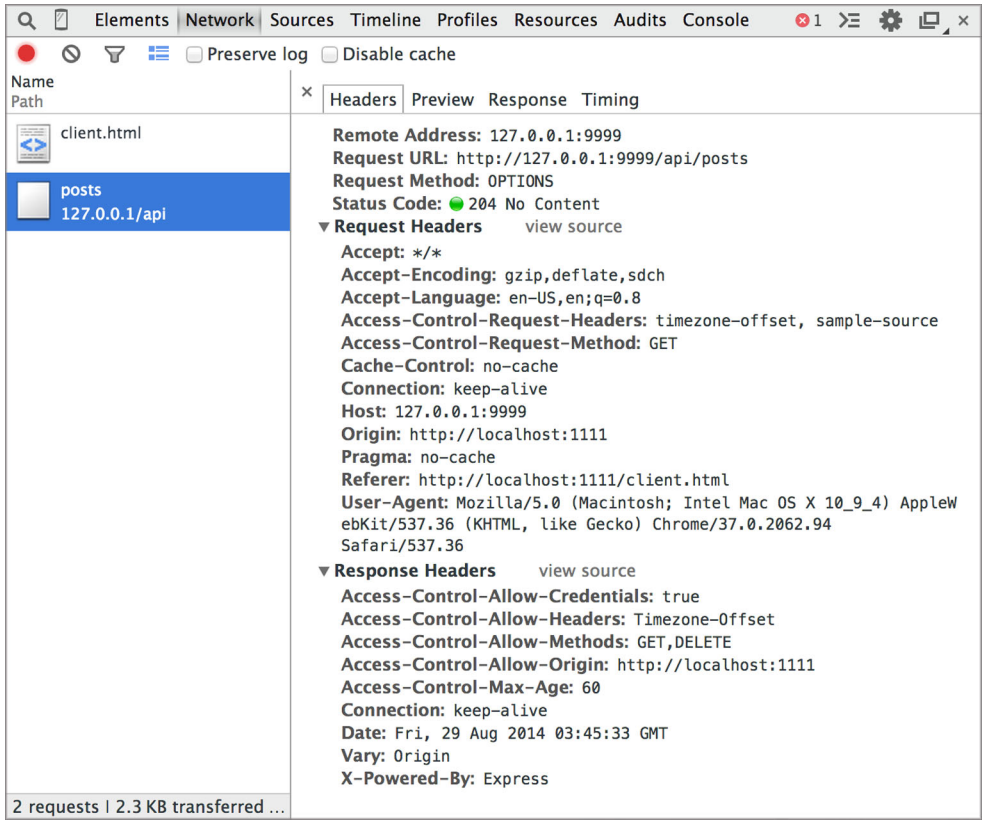


Figure 7.5 Viewing the request and response headers for the failing request

Table 7.1 CORS issue can either be fixed in the client code or the server code

In the client code	In the server code

`xhr.setRequestHeader(`
`  'Timezone-Offset',`
`  new Date().getTimezoneOffset());`
~~`xhr.setRequestHeader(`~~
~~`  'Sample-Source',`~~
~~`  'CORS in Action');`~~
 	
Remove the disallowed header from the request
	`var corsOptions = {`
	`  ...`
	`  allowHeaders: [`
	`  'Timezone-Offset',`
	`  'Sample-Source']`
	`};`
	
	Add the failing header to the `allowHeaders` whitelist (only works if you can change the server code)

cross-origin `GET` request that fails, Chrome's developer tools will hide the response headers. The response headers are hidden because of the browser's policy of hiding any information that the server hasn't opted in to. This also makes it hard to debug