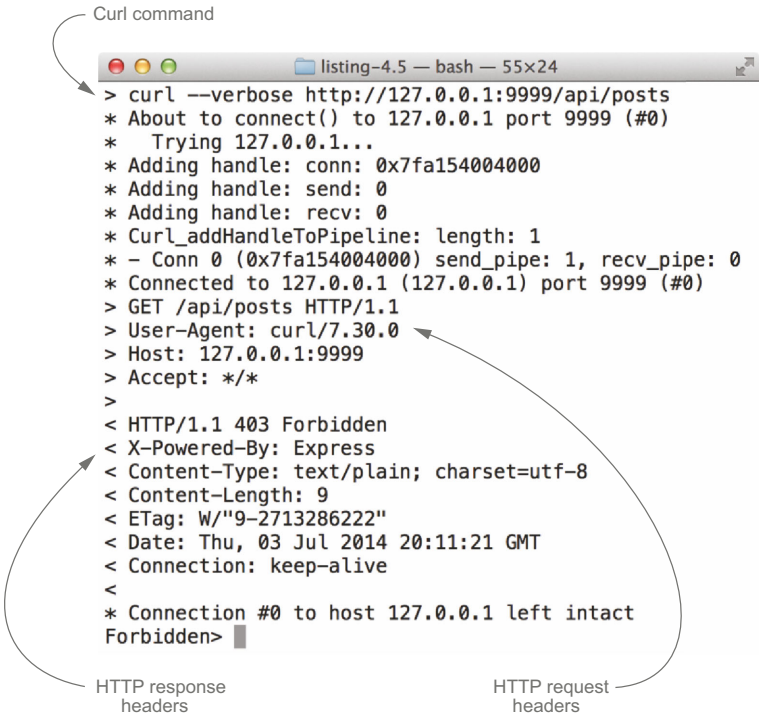


Figure 7.13 Request and response headers from the curl command

using the `-H` flag, as shown in the following code snippet. If you wanted to mimic a request from the sample client, you could set the Origin as follows:

```
curl --verbose -H "Origin: http://localhost:1111" http://127.0.0.1:9999/api/
     posts
```

Setting the Origin header is useful when you want to test an Origin but don't want to host a page on that origin. For example, the preceding command tested a request from http://localhost:1111 without having to upload and run code on the actual http://localhost:1111 site. The following command changes the Origin to a `null` value to mimic a request from a file:

```
curl --verbose -H "Origin: null" http://127.0.0.1:9999/api/posts
```

If you run this command, you'll see an Access-Control-Allow-Origin header in the response. This is because the `null` value is in the origin whitelist. The `-H` command can be used to add any request header. If you want to mimic a request from Firefox, you could add Firefox's User-Agent header to the request.

Debugging CORS requests is all about comparing the request headers to the response headers. The actual body of the response isn't too important, and it can get in the way of the header information (especially when a response has a ton of text that