pushes the headers off the screen). The response body can be hidden by redirecting it to a different location. The command to do this on Windows is

```
curl --verbose -H "Origin: null" http://127.0.0.1:9999/api/posts > NUL
```

The same command on Mac/Linux looks like this:

```
curl --verbose -H "Origin: null" http://127.0.0.1:9999/api/posts > /dev/null
```

Using this syntax makes the output easier to read. Now that you have a basic understanding of how curl works, let's take a look at how to use curl to mimic a preflight request.

7.4.2 Making preflight requests using curl

Curl can also be used to send preflight requests. Figure 7.14 (introduced in chapter 4 as figure 4.9) highlights the characteristics of a preflight request.

A preflight request will have an `OPTIONS` HTTP method ❶, an Origin header ❷, and an Access-Control-Request-Method header ❸. To mimic a preflight request using curl, you need to mimic these three characteristics.

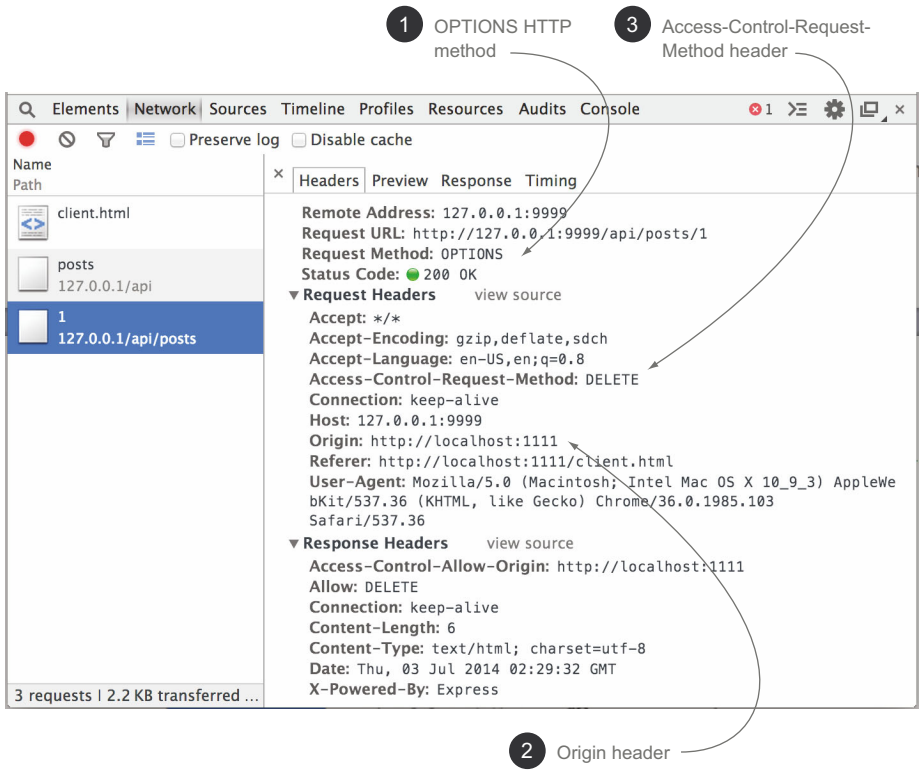


Figure 7.14 The pieces of a preflight request