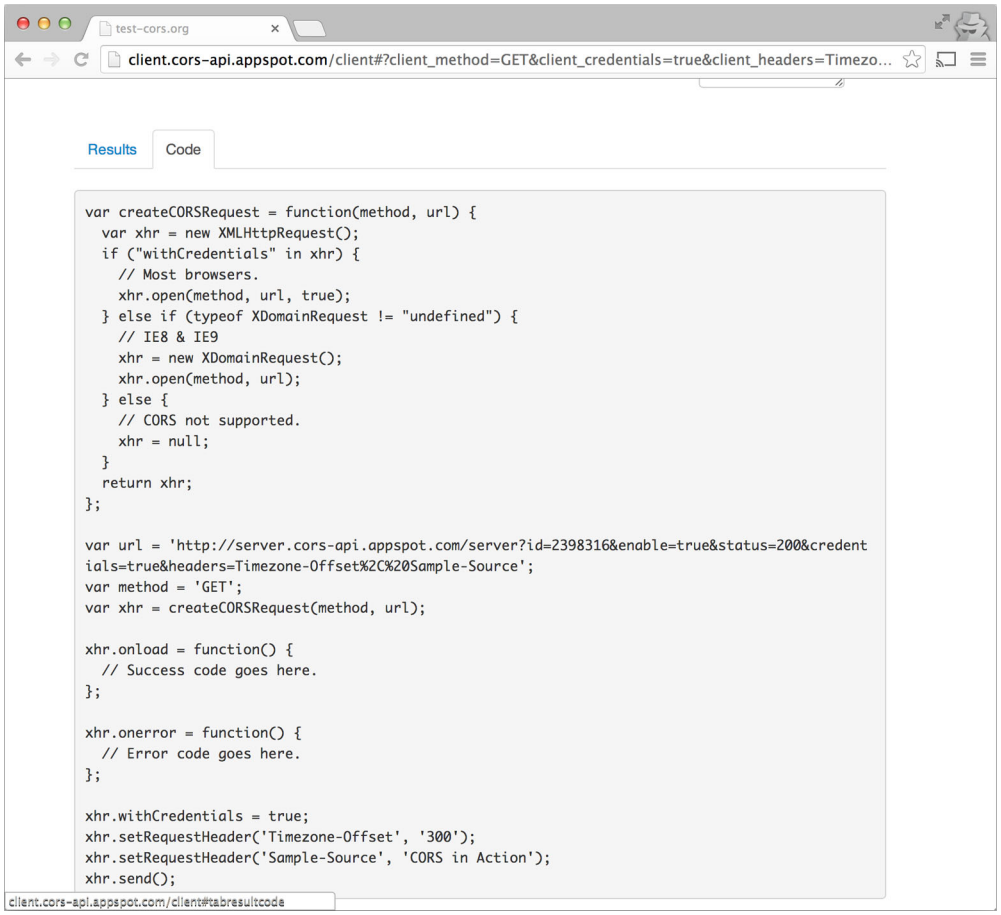


Figure 7.19 JavaScript code used to make the HTTP request

The code in figure 7.19 creates an `XMLHttpRequest` that uses the `GET` method, sets `withCredentials` to `true`, and sets the Timezone-Offset and Sample-Source request headers. You can copy and paste this code into your own page to recreate the same request.

The tools and techniques described here work great for debugging from a computer. It can be a bit harder to debug requests from mobile devices. For example, there is no way to run Wireshark on your iPhone. The next section looks at tips for debugging requests from mobile devices.

7.6 Tips for mobile debugging

Debugging requests from mobile phones can be a challenge because the tools described in this chapter aren't available on a mobile phone. But if you're debugging requests from a mobile phone, there are still techniques you can use to capture the HTTP headers.