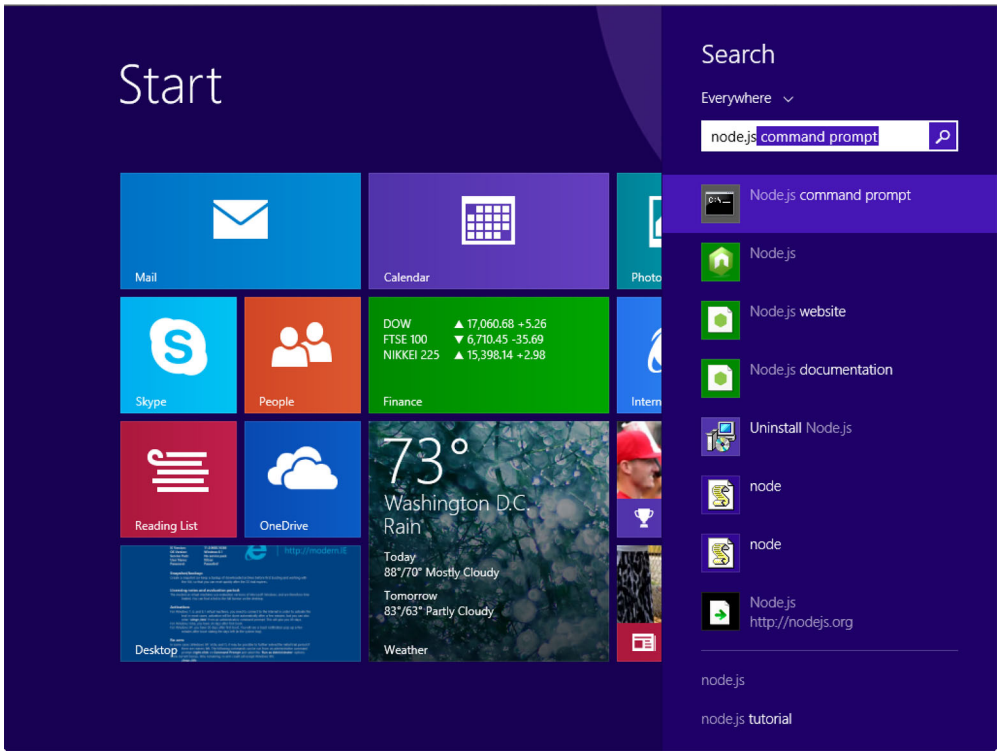


Figure B.3 Finding and running the Node.js command prompt

(in fact, you may see this security dialog for all apps you install on Windows). It's safe to click Yes to continue.

Second, Node.js comes with its own command prompt which is preconfigured with all the proper variables for running Node.js. You can find this command prompt by searching for "Node.js command prompt" in the Start menu, as shown in figure B.3.

Throughout the rest of the samples in this book, when the instructions ask you to use a terminal window, use the Node.js command prompt.

INSTALLING NODE.JS ON MAC OS X

The Mac installer comes as a PKG file. Double-click this file to begin the installation process. As you walk through the installation, use the default values for all the options.

The final step of the installation process asks you to "Make sure /usr/local/bin is in your $PATH", as shown in figure B.4.

You can easily verify this by opening a terminal window and typing `echo $PATH`. This command will print output similar to figure B.5; you should see /usr/local/bin somewhere in that path.

If for some reason that path doesn't have that value, you can manually add it with the following command:

```
export PATH=$PATH:/usr/local/bin
```