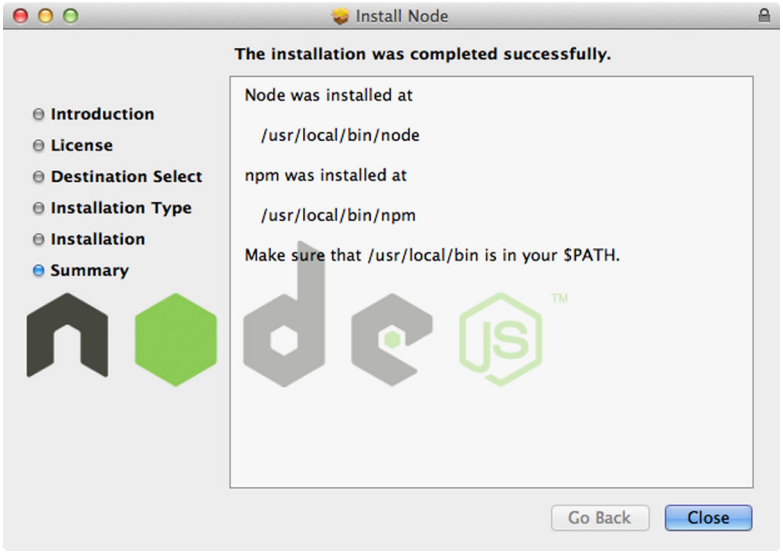


Figure B.4 Installation message about $PATH



Figure B.5 Displaying the $PATH environment variable

Installing Node.js on Linux

The Node.js website has a .tar.gz file with compiled binaries for Linux. If you have the .tar.gz file, you can install Node.js with the following commands:

```
> tar xzf node-v0.10.29-linux-x64.tar.gz
> ./configure
> make
> sudo make install
```

> **NOTE** The .tar.gz filename may differ slightly depending on which version of Node.js you downloaded.

An easier way to install Node.js on Linux is to use the package manager. Most Linux distributions have a package manager for installing tools. This can make it a little easier to install Node.js, but the downside is that the version of Node.js is sometimes a little behind the latest version. But the samples in this book should work, even for slightly older versions of Node.js.

Type the following commands into a command prompt to install Node.js from the command line (if you are not using a Debian-based distro the commands may be a little bit different):

```
> sudo apt-get update
> sudo apt-get install nodejs npm
```