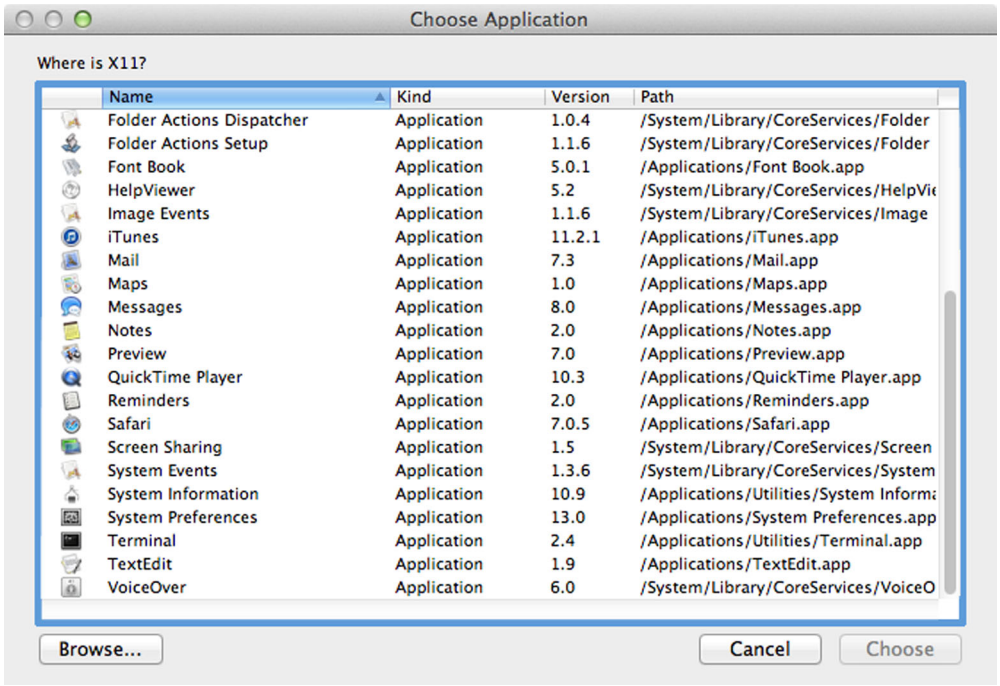


Figure B.8 Wireshark asks where XQuartz is installed the first time it runs.

The XQuartz installer can be downloaded from http://xquartz.macosforge.org/. Download and run the installer. After XQuartz is installed, it's a good idea to reboot your system. (I was unable to get Wireshark to work without a reboot.)

Once XQuartz is installed, you can download and run the Wireshark installer. When you first run Wireshark, you may be greeted with the dialog box shown in figure B.8.

This dialog is asking for the location of XQuartz. You can find XQuartz by selecting Browse..., navigating to the Application > Utilities > XQuartz app, and then clicking Choose. Wireshark should ask you this only the first time it runs; after that, Wireshark should start right up. Note that the first time Wireshark runs, it may take a long time to appear while it refreshes its fonts.

INSTALLING WIRESHARK ON LINUX

Wireshark can be installed on Debian-based Linux simply by running

```
> sudo apt-get install wireshark
```

Once this finishes running, Wireshark will be installed. To be able to run Wireshark without it requiring root permissions, you need to run the following commands:

```
> sudo dpkg-reconfigure wireshark-common
> sudo adduser $USER wireshark
```