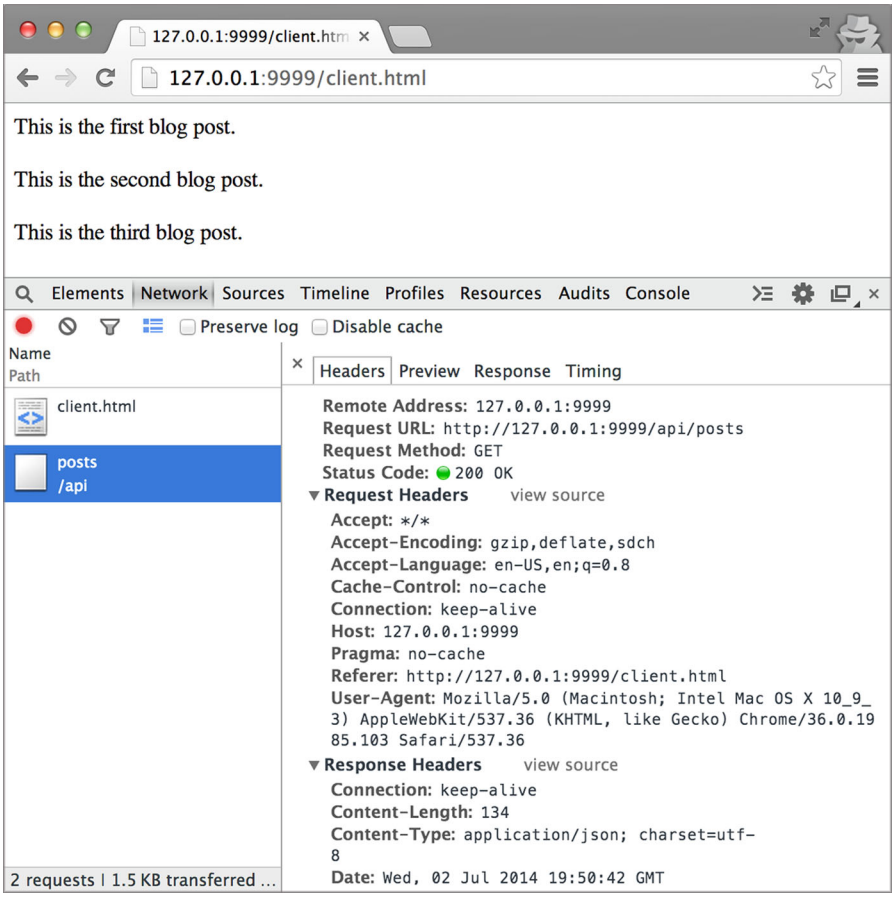


Figure 3.7 Viewing the HTTP request and response to the API

click the /api/posts request, then the Headers tab, you can see all the details of the request and response, as shown in figure 3.7.

The remainder of this book will make incremental updates to this sample code to demonstrate how the features of CORS work. You'll switch back and forth between the terminal and the browser depending on which part of the code we're looking at. Now that the sample app is up and running, let's introduce CORS to the mix.

3.2 Making a CORS request

The previous section created a sample app running on a single server at 127.0.0.1:9999. This sample app makes a same-origin HTTP request to load the blog data from the /api/posts endpoint. Now that the sample app is set up, let's modify it to make a cross-origin request.

You can make a cross-origin request by introducing a new server that sends requests to the API on 127.0.0.1:9999. Listing 3.3 modifies app.js to introduce a second server