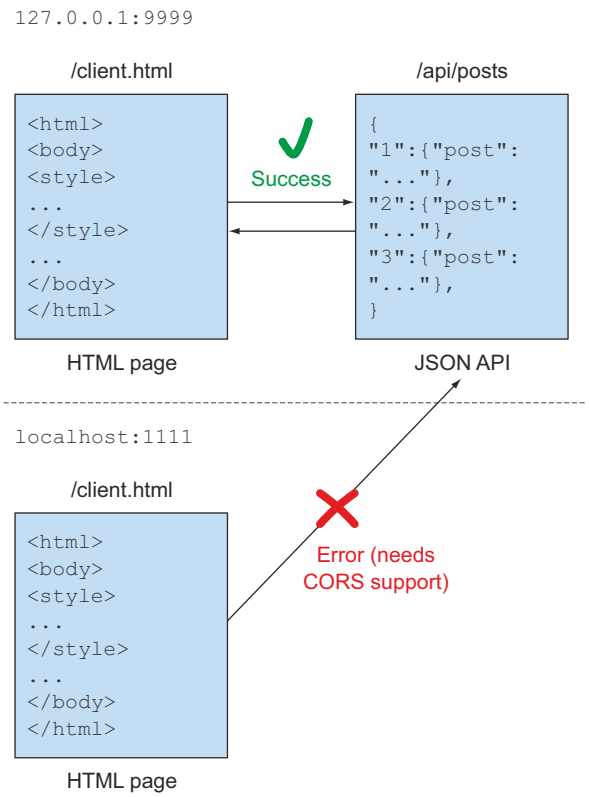


Figure 3.8 Topology of sample app with new server

running at localhost:1111. Requests from 127.0.0.1:9999 to localhost:1111 are cross-origin requests, because 127.0.0.1:9999 and localhost:1111 are different. Figure 3.8 shows what this new server configuration looks like.

Listing 3.3 Update app.js to add a new server running on localhost:1111

```
serverapp.listen(SERVER_PORT, function() {
  console.log('Started server at http://127.0.0.1:' + SERVER_PORT);
});

var CLIENT_PORT = 1111;                                  <-- Code for second server begins here
var clientapp = express();
clientapp.use(express.static(__dirname));
clientapp.listen(CLIENT_PORT, function(){
  console.log('Started client at http://localhost:' + CLIENT_PORT);
});
```

If you restart the server, then visit the page at http://localhost:1111/client.html, you'll receive an error in the browser as well as the JavaScript console, as shown in figure 3.9. Contrast this to the page at http://127.0.0.1:9999/client.html, which still works. Both pages are using the same client.html code, so what's the difference?