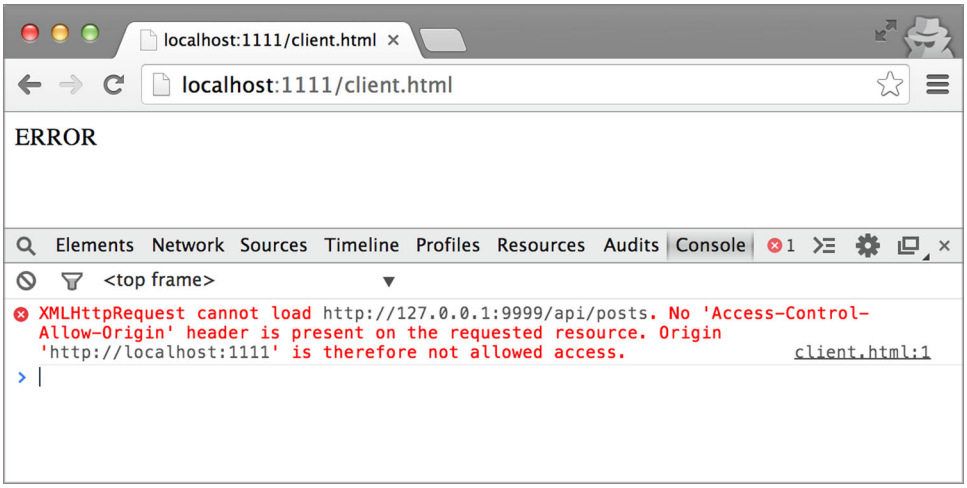


Figure 3.9 Error when making a cross-origin request

> **NOTE** If you are using Internet Explorer 10 or above, you need to add http://localhost to your Trusted Sites for the sample to work. You do this by navigating to Trusted Sites (located under Internet Options > Security > Trusted Sites > Sites) and adding http://localhost.

The difference is that the request from http://127.0.0.1:9999/client.html is a same-origin request, while the request from http://localhost:1111/client.html is a cross-origin request. The request from http://127.0.0.1:9999/client.html succeeds because the request comes from the same location as the server (127.0.0.1:9999). The request from http://localhost:1111/client.html fails because it crosses server boundaries, and you haven't yet configured the server to accept these requests.

The rest of this chapter will work toward fixing that error. To do that, let's first discuss what happens behind the scenes when you make a CORS request.

3.3 Anatomy of a CORS request

Think about what happens when you want to withdraw money from an ATM. You walk up to the machine, swipe your card, enter your PIN, and a few seconds later you walk away with money in your wallet. Figure 3.10 shows each of the players in this transaction.

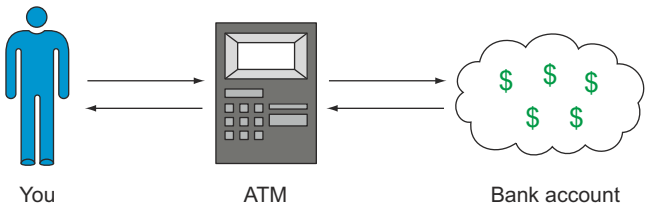


Figure 3.10 A bank withdrawal consists of you, the ATM, and your bank account