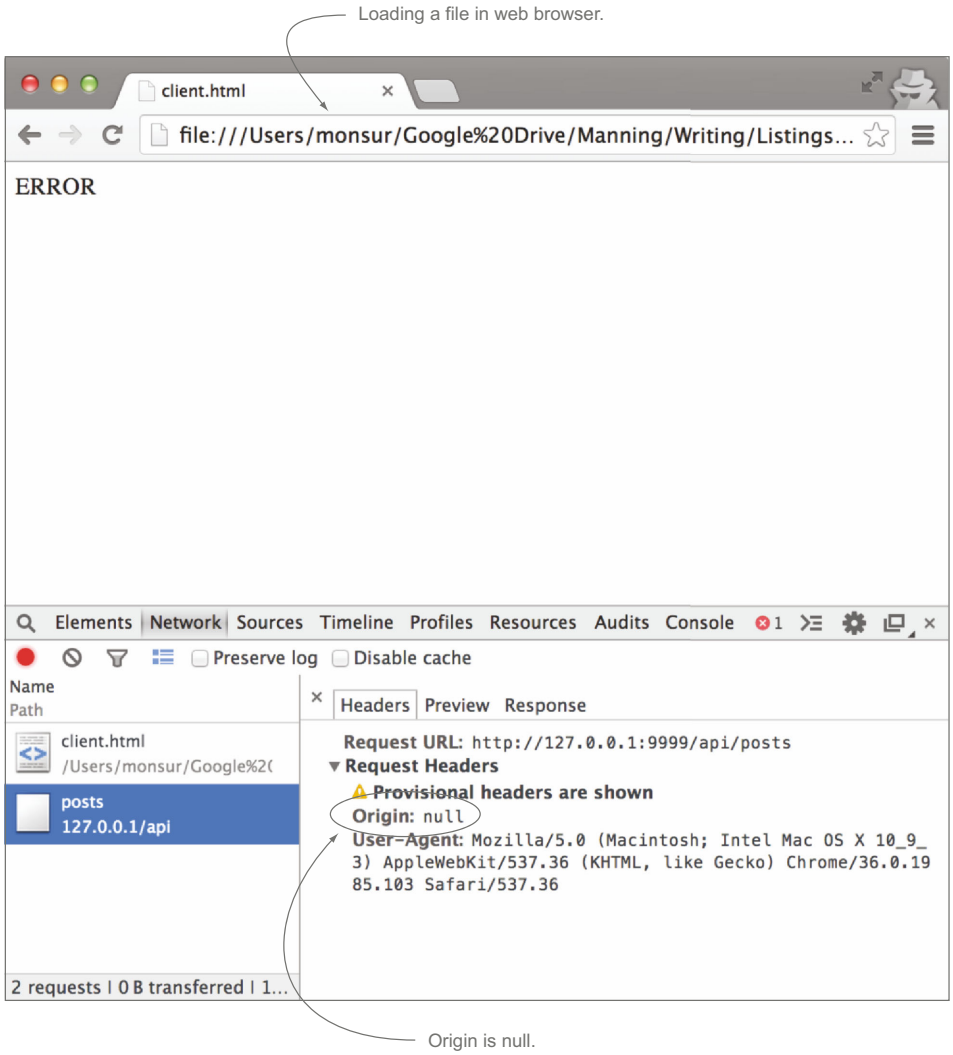


Figure 3.16 Request with null origin

exists on your local filesystem and isn't loaded from a remote server. Therefore it doesn't have an origin. You can see this in action by double-clicking the client.html file to open it in your browser. Looking in the Network tab, you'll see the Origin header set to `null`, as shown in figure 3.16. It's important to be aware of `null` origin values and respond to them appropriately. We'll cover this in more detail in chapter 6.

The term *origin* may be misleading in the context of CORS because it can be interpreted as the origin of the request. Origin has nothing to do with HTTP requests/responses in this case; it's only a property of a URL. Any URL can have an origin. When an origin refers to the client making the request, we call it the *client origin*. When an