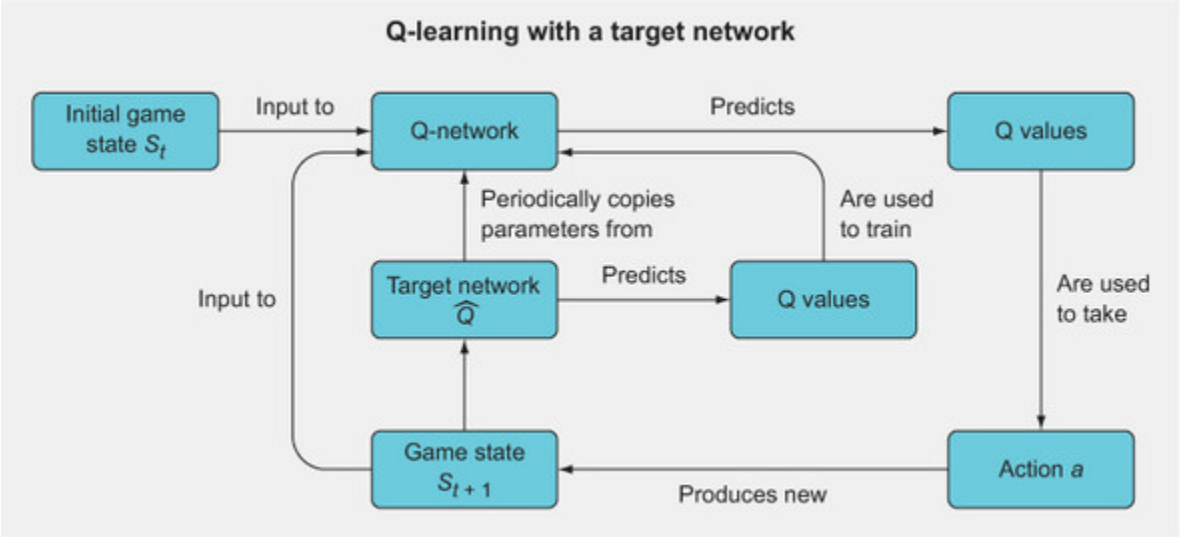


The code is getting a bit long now, with both experience replay and a target network, so we'll just look at a portion of the full code here in the book. We'll leave it to you to check out the book's GitHub repository where you'll find all the code for this chapter.

The following code is identical to listing 3.5 except for a few lines that add in the target network capability.

Listing 3.7. Target network

```
import copy

model = torch.nn.Sequential(
    torch.nn.Linear(l1, l2),
    torch.nn.ReLU(),
    torch.nn.Linear(l2, l3),
    torch.nn.ReLU(),
    torch.nn.Linear(l3,l4)
)

model2 = model2 = copy.deepcopy(model)          1
model2.load_state_dict(model.state_dict())      2
sync_freq = 50                                  3

loss_fn = torch.nn.MSELoss()
learning_rate = 1e-3
optimizer = torch.optim.Adam(model.parameters(), lr=learning_rate)

                                                4
```