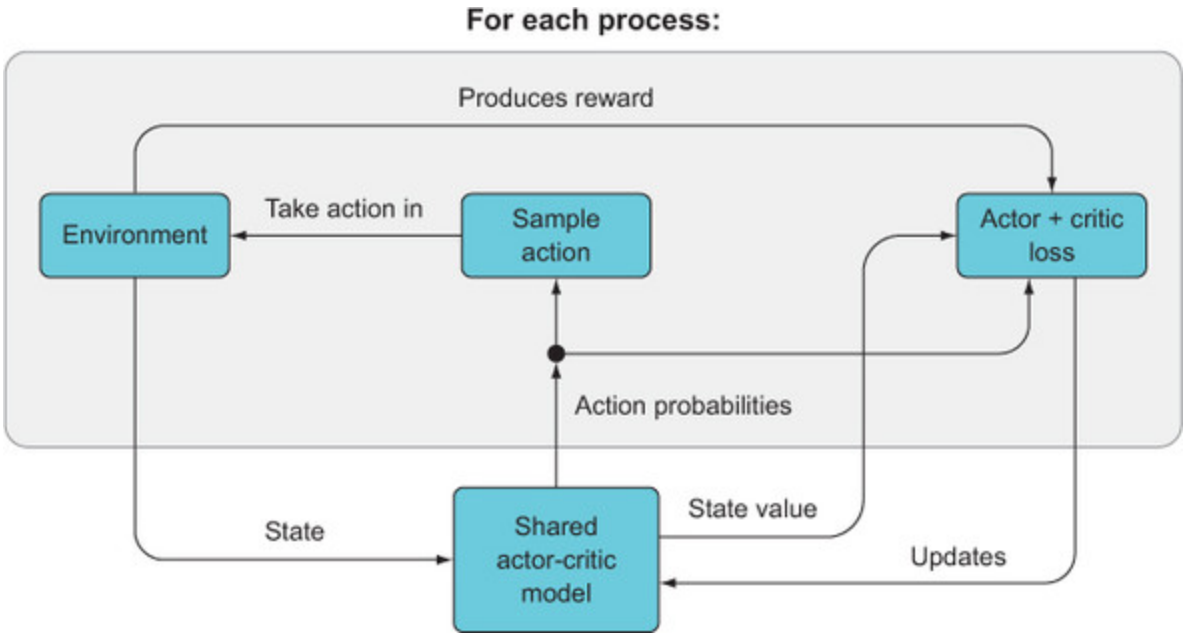


Since each worker is spawned in a new process that has its own memory, all the data the worker needs should be passed in as an argument to the function explicitly. This also prevents bugs.

In listing 5.7 we define a function to run a single instance of the actor-critic model through one episode in the CartPole environment.

Listing 5.7. Running an episode

```
def run_episode(worker_env, worker_model):
    state = torch.from_numpy(worker_env.env.state).float()
1
    values, logprobs, rewards = [],[],[]
2
    done = False
    j=0
    while (done == False):
3
        j+=1
        policy, value = worker_model(state)
4
        values.append(value)
        logits = policy.view(-1)
        action_dist =
torch.distributions.Categorical(logits=logits)
        action = action_dist.sample()
5
        logprob_ = policy.view(-1)[action]
```