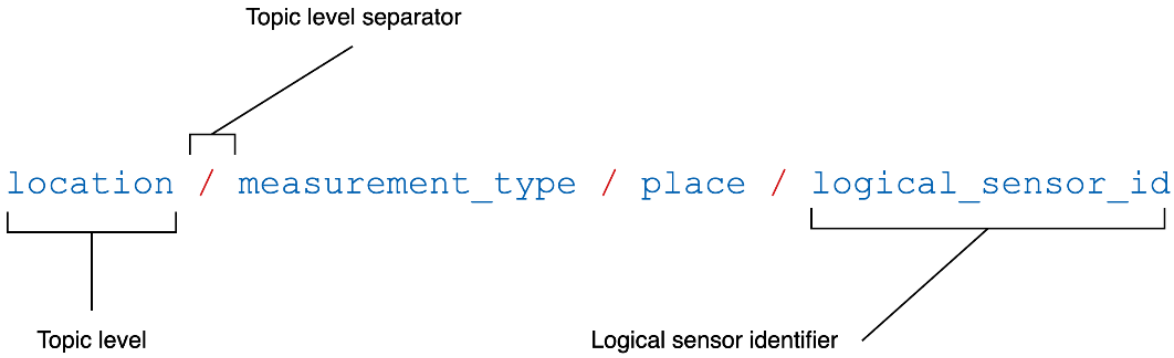


Which leads to topics named as follows:

```
home/electricity/electricitymeter/power_meter_1
home/electricity/washingmachine/power_meter_2
home/electricity/refrigerator/power_meter_3
home/water/washingmachine/power_meter_4
home/water/washingmachine/flow_meter_1
home/water/garden/flow_meter_2
home/environment/bedroom1/temp_sensor_1
home/environment/bedroom2/temp_sensor_2
home/environment/outdoors/temp_sensor_3
home/environment/indoors/moisture_temp_sensor_1
```

This enables me to use powerful subscription patterns with MQTT wildcards —for example, subscribing to `home/water/#` captures all water flow readings. By adopting logical sensor identifiers in the topic naming rather than physical sensor identifiers, I can switch out sensor hardware without having to rename any topics, and I can use the same topics regardless of whether the data travelled via LoRaWAN or WiFi.

TRY IT OUT: SEND AND RECEIVE DATA ON MQTT

You can try out publishing data to an MQTT topic and subscribing to messages from MQTT with the code shown in listing 3.2, which uses a public MQTT broker to send a dummy temperature reading as if it were coming from a temperature sensor in my bedroom. The program subscribes to the same topic to read the published data to the console. Since `test.mosquitto.org` is a public MQTT broker, if you change the code to subscribe to ALL topics and not just the one that you publish to (in MQTT,