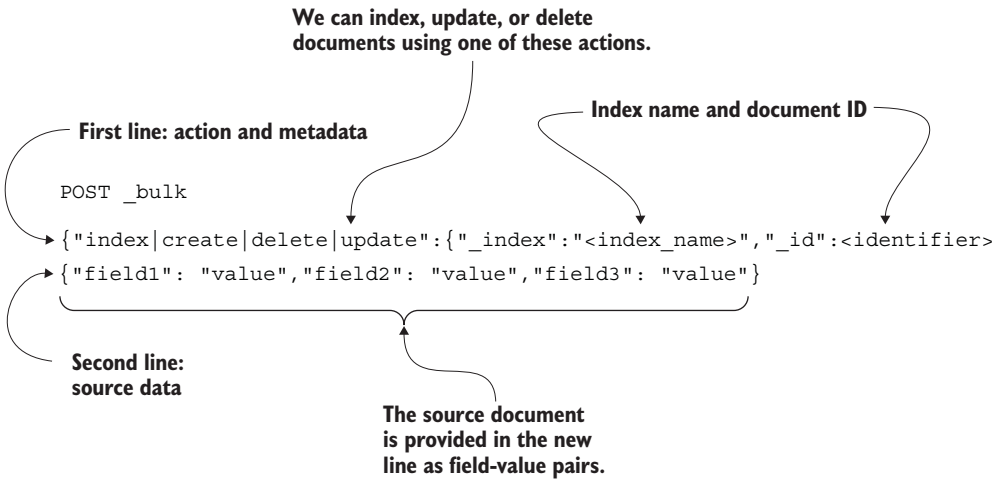


Figure 5.15 The `_bulk` API's generic format

The second line in figure 5.15 is the document's source, which is what we want to store the document. As expected, the document is formatted in JSON and added to the request in the new line. Both the metadata and source lines are delimited with new line (`\n`) separators expressed in JSON (that is, newline-delimited JSON [NDJSON, http://ndjson.org]—a convenient format for storing records to be consumed one by one).

> **NOTE** The request attached to the `_bulk` API must adhere strictly to the NDJSON format; otherwise, the documents won't be bulk indexed. Each line must end with a newline delimiter because the bulk request is newline-sensitive. Make sure your document is formatted as NDJSON.

With this concept in mind, let's create a bulk request to index the `movie` document *Mission Impossible*.

5.6.2 Bulk indexing documents

We want to index documents using `_bulk` API, so let's check out the following example. The same request is shown in figure 5.16 with annotations.

Listing 5.41 Bulk indexing in action

