NOTE Elasticsearch lets us create a plethora of custom analyzers by mixing and matching filters and tokenizers. It would be too verbose and impractical to go over each of them, but I present as many examples as possible in this chapter. Refer to the official documentation for specific components and their integration into your application. I've also added more examples in the book's source code that you can use to experiment with analyzers.

7.3.1 The standard analyzer

The `standard` analyzer is the default analyzer used in Elasticsearch. Its job is to tokenize sentences based on whitespace, punctuation, and grammar. Suppose we want to build an index with a strange combination of snacks and drinks. Consider the following text that mentions coffee with popcorn:

Hot cup of ☕ and a 🍿 is a Weird Combo :(!!

We can index this text into a `weird_combos` index:

```
POST weird_combos/_doc
{
  "text": "Hot cup of ☕ and a 🍿 is a Weird Combo :(!!"
}
```

The text is tokenized, and the list of tokens is split (shown here in a condensed form):

```
["hot", "cup", "of", "☕", "and", "a", """🍿""", "is", "a", "weird", "combo"]
```

The tokens are lowercased, as you can see in the output. The standard tokenizer removes the smiley at the end and the exclamation marks, but the emojis are saved as if they were textual information. This is the default behavior of the `standard` analyzer, which tokenizes the words based on whitespace and strips out non-letter characters like punctuation. Figure 7.4 shows the workings of this example input text when passed through the analyzer.

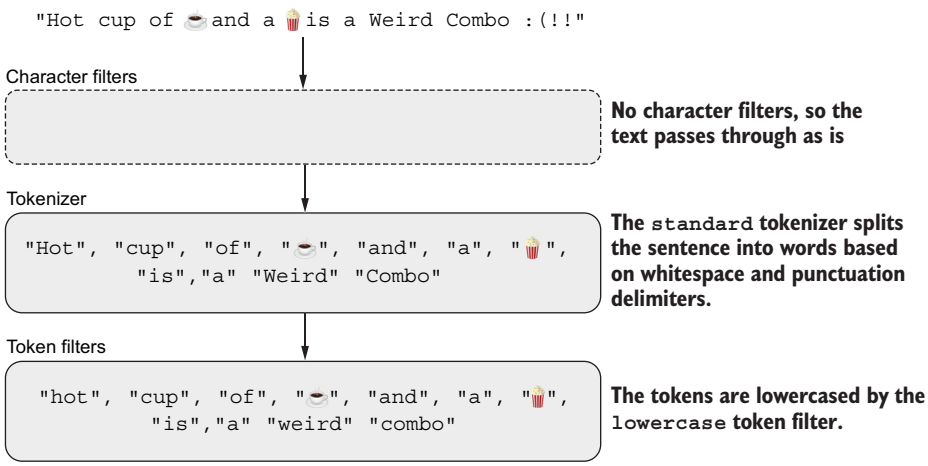


Figure 7.4 The `standard` (default) analyzer in action