7.3.2 The simple analyzer

While the `standard` analyzer breaks text into tokens when it encounters whitespace or punctuation, the `simple` analyzer tokenizes sentences at the occurrence of a non-letter like a number, space, apostrophe, or hyphen. It does this by using a `lowercase` tokenizer, which is not associated with any character or token filters (see figure 7.7).

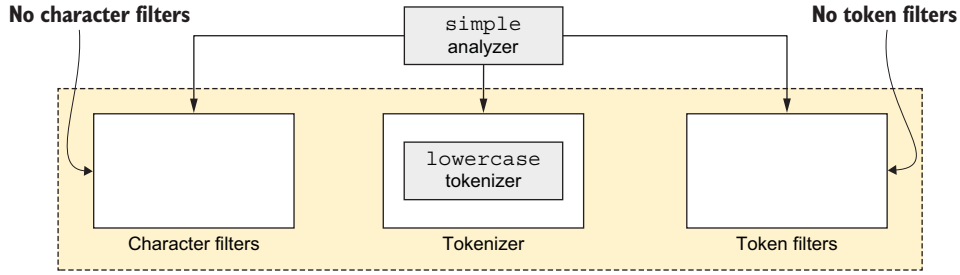


Figure 7.7 Anatomy of a `simple` analyzer

Let's consider an example of indexing the text "Lukša's K8s in Action".

Listing 7.12 Analyzing text using a `simple` analyzer

```
POST _analyze
{
  "text": ["Lukša's K8s in Action"],
  "analyzer": "simple"
}
```

This results in the following:

```
["lukša","s","k","s","in","action"]
```

The tokens were split when an apostrophe ("Lukša's" becomes "Lukša" and "s") or number ("K8s" becomes "k" and "s") was encountered, and the resulting tokens were lowercased.

A `simple` analyzer can't do much configuration, but if we want to add a filter (character or token), the easiest way to do so is to create a custom analyzer with the required filters and the `lowercase` tokenizer (the `simple` analyzer has a lone `lowercase` tokenizer). We see this in section 7.4.

7.3.3 The whitespace analyzer

As the name suggests, the `whitespace` analyzer splits the text into tokens when it encounters whitespace. There are no character or token filters on this analyzer except a `whitespace` tokenizer (see figure 7.8). The following listing shows a script using the `whitespace` analyzer.