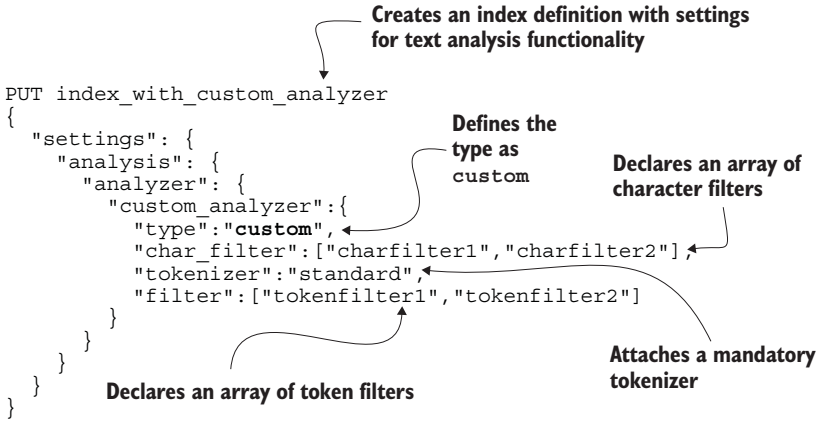


Figure 7.12 Anatomy of a custom analyzer

NOTE In my opinion, the developers of Elasticsearch should have named the `filter` object `token_filter`, instead, to match `char_filter`. And using plural names (`char_filters` and `token_filters`) also would have made more sense, because they expect an array of stringified filters!

We provide a tokenizer from the list of off-the-shelf tokenizers with our custom configuration. Let's look at an example. Listing 7.24 shows the script for developing a custom analyzer. It has the following:

- A character filter (`html_strip`) that strips HTML characters from the input field
- A `standard` tokenizer that tokenizes the field based on whitespace and punctuation
- A token filter for uppercasing words

Listing 7.24 Custom analyzer with filters and a tokenizer

