13.4.1 Parent aggregations

Parent aggregations work on input from the child aggregation to produce new buckets, which are then added to the existing buckets. Take a look at the following code listing.

Listing 13.19 Parent aggregations

```
GET coffee_sales/_search
{
  "size": 0,
  "aggs": {
    "coffee_sales_by_day": {
      "date_histogram": {
        "field": "date",
        "calendar_interval": "1d"
      },
      "aggs": {
        "cappuccino_sales": {
          "sum": {
            "field": "sales.cappuccino"
          }
        }
      }
    }
  }
}
```

As figure 13.4 shows, the `cappuccino_sales` aggregation is created as a child of the parent `coffee_sales_by_day` aggregation. It is at the same level as `date_histogram`.

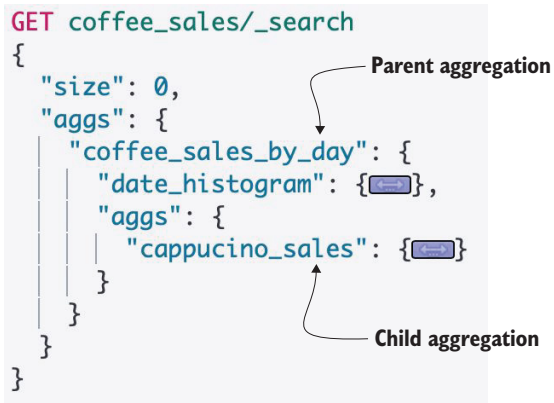


Figure 13.4 Parent aggregations visualized

Such an aggregation produces buckets inside the existing bucket. Figure 13.5 shows this result: the `cappuccino_sales` aggregation produces new buckets that are tucked under the main `date_histogram` bucket.