The `coffee_date_histogram` and `total_sale_of_americanos` aggregations are defined at the same level. If we take a snapshot of the query with the aggregations collapsed, they look like figure 13.6.

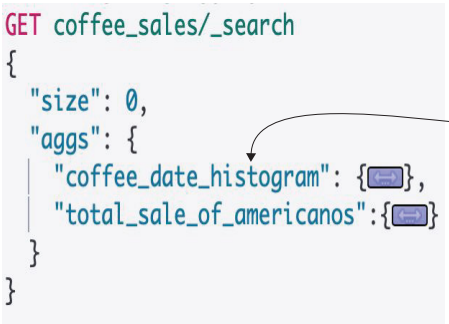



**Figure 13.6 Sibling aggregations on the query side**

When we execute sibling queries, new buckets are produced; however, unlike with parent aggregations, where buckets are created and added to the existing buckets, with sibling aggregations, new aggregations or new buckets are created at the root aggregation level. The query in listing 13.20 produces the aggregated results in figure 13.7 with newly created buckets for each sibling aggregator.




**Figure 13.7 Sibling queries output aggregations at the same level**

## 13.5 Pipeline aggregations

In the last few sections, we looked at creating aggregations by generating metrics on data, bucketing data, or both. But sometimes we want to chain multiple aggregations to produce another metric level or a bucket. For example, say that we want to find the maximum and minimum of all the buckets produced during an aggregation or find