presented in scripts executable with the Kibana code editor. The full cURL command is shown in figure 2.3 (Kibana hides the full URL).

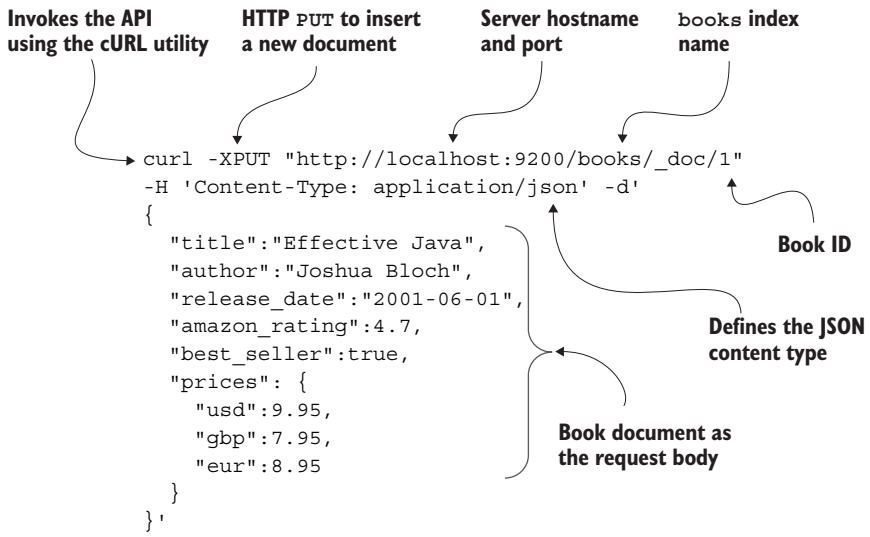


Figure 2.3 Elasticsearch URL invocation endpoint using cURL

As you can see, cURL expects us to provide request parameters such as the content type, document, and so on. Because the cURL commands are terminal commands (command-line invocation), preparing the request is cumbersome and, at times, error-prone.

Fortunately, Kibana lets us drop the server details, content types, and other parameters, so the invocation looks something like that shown in figure 2.4. As I mentioned, in this book we stick with Kibana to interact with Elasticsearch.

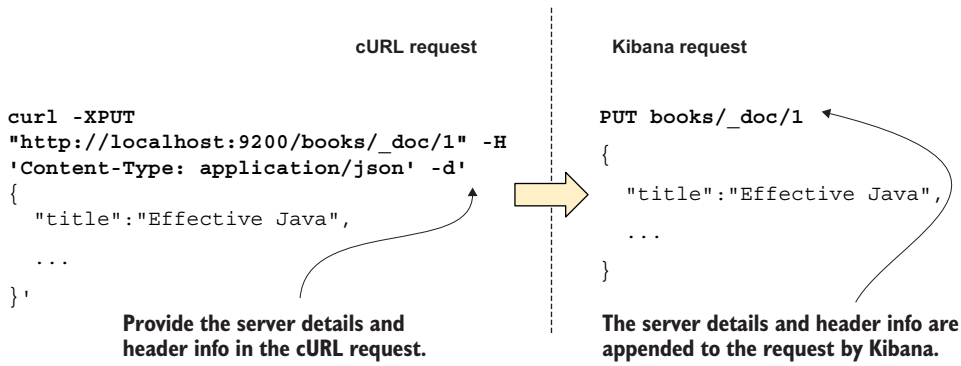


Figure 2.4 Transitioning from a cURL command to Kibana's request command