```
      },
      "address":{
        "type": "geo_point"
      }
    }
  }
}
```

Let's index a sample restaurant (fictitious London-based Sticky Fingers) with an address provided as a longitude and latitude.

Listing 4.21 Address represented by longitude and latitude

```
PUT restaurants/_doc/1
{
  "name":"Sticky Fingers",
  "address":{
    "lon":"0.1278",
    "lat":"51.5074"
  }
}
```

The address is provided as a pair of longitude and latitude values.

The restaurant's address is given in the form of a longitude (`lon`) and latitude (`lat`) pair. There are other ways to provide these inputs, as we see shortly; but first, let's fetch restaurants within the location perimeter.

We can fetch restaurants using a `geo_bounding_box` query to search data involving geographical addresses. The query takes inputs of `top_left` and `bottom_right` geo-points (provided as `lon` and `lat` pairs) to create a boxed area around our point of interest, as shown in figure 4.8.

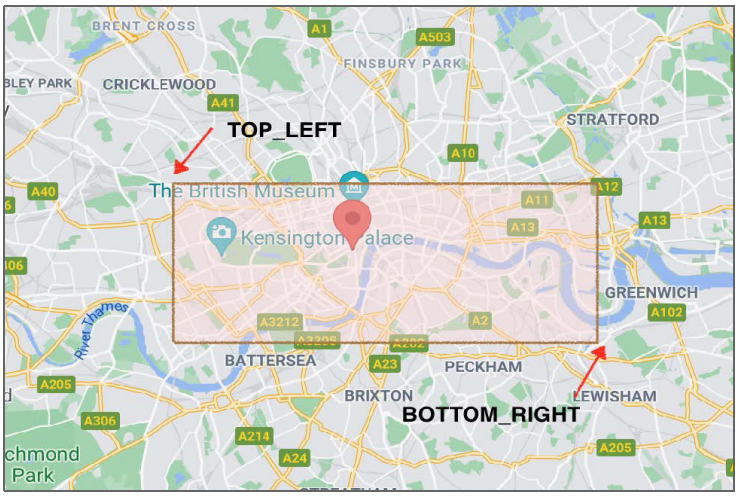


Figure 4.8 Geo-bounding box around a location in central London