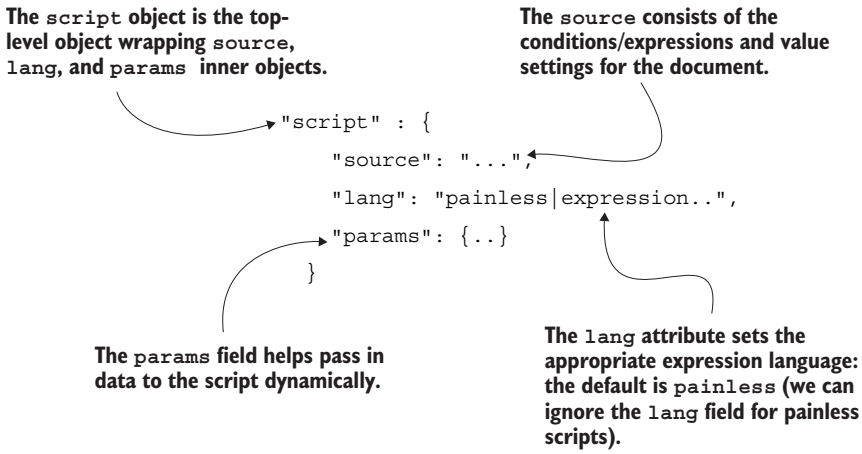


Figure 5.13 The anatomy of a script

The `source` field is where we provide the logic, while the `params` field contains the parameters that the script expects, separated by a vertical bar (or pipe) character. We can also provide the language our script is written in: for example, one of the languages `painless`, `expression`, `moustache`, or `java`, where `painless` is the default. Next, let's see how to update a document by passing values via the `params` attribute.

PASSING DATA TO A SCRIPT

One problem with the code in listing 5.27 is that we hardcoded the threshold earnings in the script (gross earnings as $150 million). Instead, we can set a threshold value in the script using the `params` property. Let's revisit our blockbuster script, but this time we pass the value of the gross earnings threshold to the script's logic via `params`.

Listing 5.29 Dynamically passing a parameter to the script

```
POST movies/_update/1
{
  "script": {
    "source": """
 if(ctx._source.boxoffice_gross_in_millions >
     params.gross_earnings_threshold)
   {ctx._source.blockbuster = true}
 else
   {ctx._source.blockbuster = false}
 """,
    "params": {
      "gross_earnings_threshold":150
    }
  }
}
```

Business logic goes here.

Checks the value against params

Provides the parameter values