Listing 5.1 Indexing a new document into the `movies` index

```
PUT movies/_doc/1
{
  "title":"The Godfather",
  "synopsis":"The aging patriarch of an organized crime dynasty transfers
  ➥ control of his clandestine empire to his reluctant son"
}
```

Body of the request

Document indexing URL

The URL `PUT movies/_doc/1` is the RESTful method that invokes the document index API. This request has a body represented by the enclosing JSON document (with the movie data). The results are shown in figure 5.1. Let's quickly go over the parts of the URL, as listed in table 5.1.

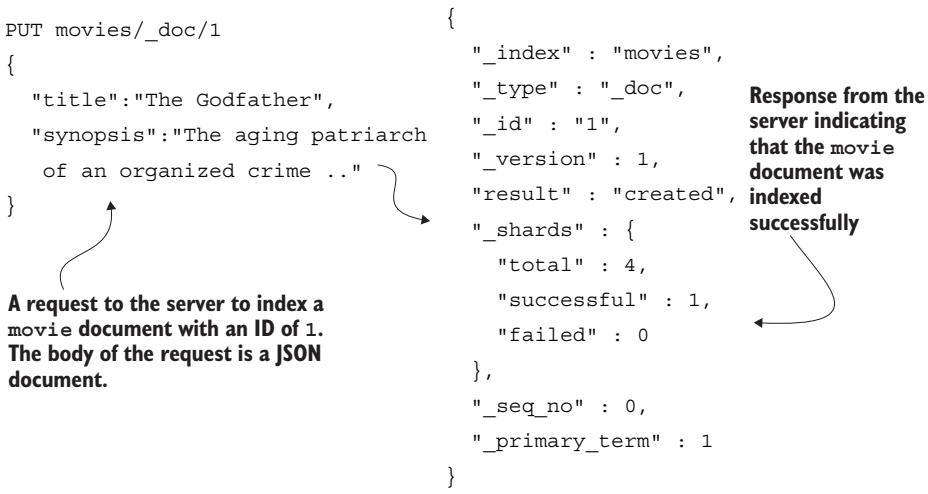


Figure 5.1 Indexing a document with an ID

Table 5.1 `PUT` URL constituents

`PUT`	The HTTP verb indicates that we are asking the server to create a new resource. The usual convention for a `PUT` action is to send some data to the resource URL so the server will create the new resource in its store.
`movies`	The name of the index where we want our `movie` document to persist.
`_doc`	The endpoint of the service call. In earlier Elasticsearch versions (before 5.x), the URL had a type associated with it (something like `movies/movie/1`). The document type was deprecated, and a generic endpoint `_doc` was amended to the URL (making it `movies/_doc/1`).
`1`	The path parameter to indicate the resource's ID (the `movie` document's ID).