NOTE The `POST` method doesn't expect the user to provide the document ID. Instead, it automatically generates a randomly created ID for the document when it is persisted. We can also use `POST` with an ID. For example, `POST myindex/_doc/1` is a valid invocation. However, `PUT` without an ID is invalid; that is, invoking `PUT myindex/_doc` will throw an error.

As an example, let's consider users posting movie reviews. Each movie review is captured as a JSON document, which is sent to Elasticsearch from Kibana. We are not going to provide the document ID for this request.

Listing 5.3 Indexing a movie review without an ID

```
POST movies_reviews/_doc
{
  "movie":"The Godfather",
  "user":"Peter Piper",
  "rating":4.5,
  "remarks":"The movie started with a ..."
}
```

The URL has no ID.

Once the server executes the index request, the response is sent back to the Kibana console. Figure 5.3 illustrates this process.

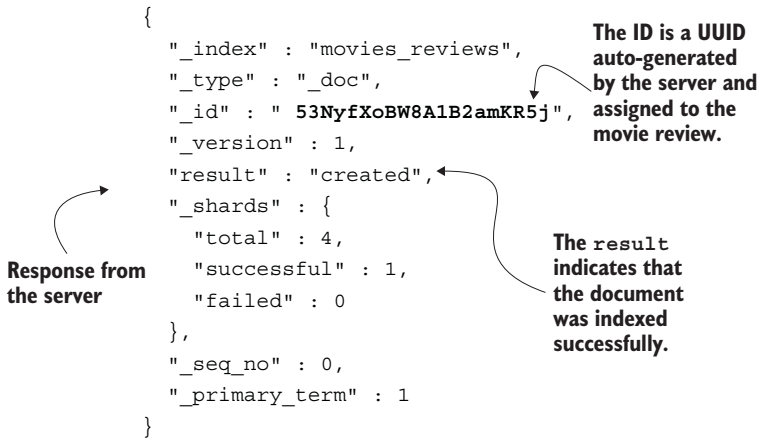


Figure 5.3 The server creates and assigns a randomly auto-generated ID to the document.

In the response, the `_id` field is randomly generated data, while the rest of the information is the same as the earlier `PUT` request shown in listing 5.1. You may wonder how we decide which verb to consider when indexing the document—the `PUT` or `POST` method. The following sidebar provides an answer!