```
{
  "es_cluster_snapshot_repository" : {
    "type" : "fs",
    "settings" : {
      "location" : "/volumes/es_snapshots"
    }
  }
}
```

The response shows that one snapshot repository is registered and available for our snapshots.

> **NOTE** If you are running Elasticsearch on your local machine, you can set a temp folder as your repository location. For example, you can use /tmp/es_snapshots for *nix-based operating systems or c:/temp/es_snapshots for Windows.

As mentioned, we can use Kibana's Console to work with the snapshot and restore feature. As we did with the APIs, we can register the repository, too. Although the details of working with Kibana are outside the scope of this book, I provide a few pointers so you can work with the snapshot and restore functionality on Kibana.

REGISTERING A SNAPSHOT REPOSITORY ON KIBANA

Kibana has extensive support for working with the snapshot and restore feature, including registering snapshots, executing them, and restoring them. Let's see how we can register the repository on Kibana.

Head to the top-left menu of the Kibana Console and expand the Management menu, where you'll see, along with Dev Tools, a Stack Management navigation link (see figure 14.10). Click the link to navigate to the Stack Management page. Then, choose the Data > Snapshot and Restore menu item. The resulting page provides current repositories, snapshots, and their states.

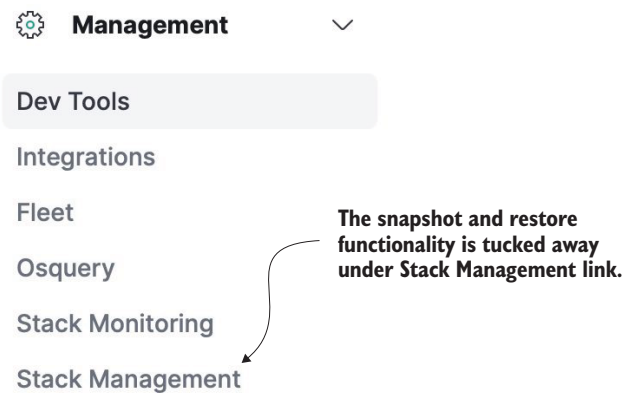


Figure 14.10 Accessing the Stack Management page for snapshot functionality