include the `config` block, all indexes and data streams are included in snapshot backups by default. The `include_global_state` attribute indicates that we want to include the cluster state in the snapshot. In the listing, we ignore the cluster state (`include_global_state` is set to `false`) as part of the snapshot.

The final piece is the retention information (`"retention":`), which specifies how long we want to keep the snapshots in the repository. We set the current snapshot's lifetime as one week by setting the `expire_after` attribute to `7d`.

When we execute this query, the automatic snapshot facility remains in place until we delete the policy. It is executed based on the schedule. This is the easier and preferred way to back up the entire cluster without manual intervention.

SLM USING KIBANA

We can also create an SLM policy using Kibana. Let's see briefly how to do this:

1. In Kibana, navigate to the Management > Snapshot and Restore feature link.
2. Click the Policies tab, and invoke the creation of a new policy by clicking the Create Policy button.
3. Fill in the details of this page as shown in figure 14.13.

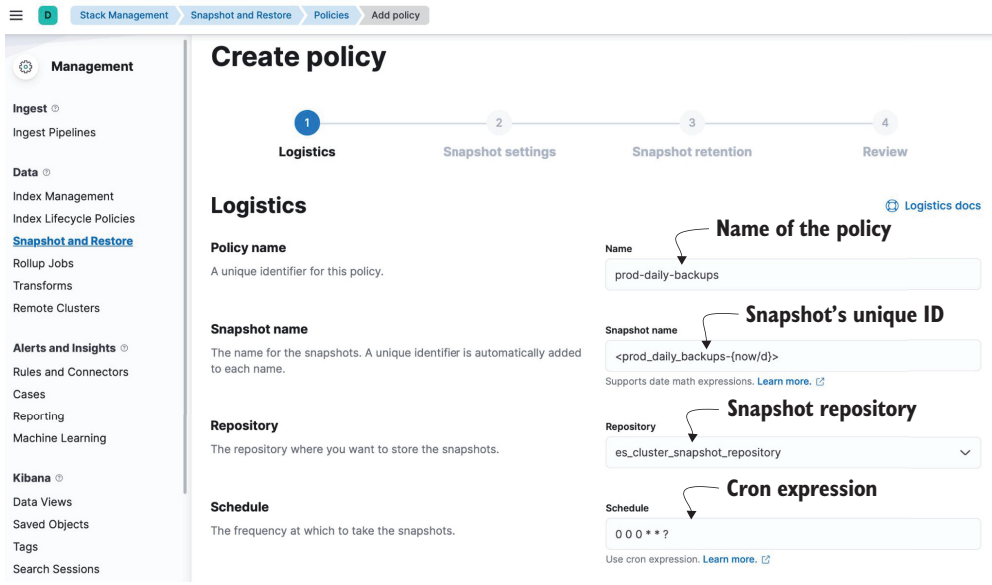


Figure 14.13 Creating an SLM policy using the Kibana Console

4. Navigate to the next page by clicking the Next button. Fill in the details related to the `config` block of the query in listing 14.11, including any specific indexes and data streams (or all), the global cluster state (or not), and so on. Figure 14.14 shows the Snapshot Settings configurations.