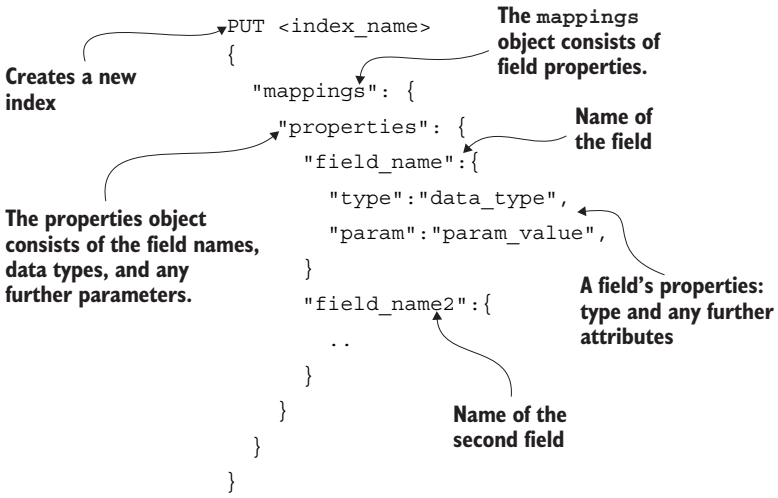


Figure 4.6 Creating a mapping definition during index creation

Now that we know the theory behind using the mapping API for creating a schema, let's put it to work by developing a mapping schema for an `employee` model, as in the following listing. Employee information is modeled with fields such as `name`, `age`, `email`, and `address`.

We index the document containing these fields into an `employees` index by invoking the mapping API over an HTTP PUT action. The request body is encapsulated with properties for our fields.

Listing 4.4 Creating the schema up front

```
PUT employees
{
  "mappings": {
    "properties": {
      "name":{ "type": "text"},
      "age": {"type": "integer"},
      "email": {"type": "keyword"},
      "address":{
        "properties": {
          "street":{ "type":"text" },
          "country":{ "type":"text" }
        }
      }
    }
  }
}
```

The email field is a keyword type.
The name field is a text data type.
The age field is a number type.
Inner object properties
Address object in an inner object with further fields

Once the script is ready, execute this command in Kibana's Dev Tools. You should receive a successful response in the right pane, indicating that the index was created.