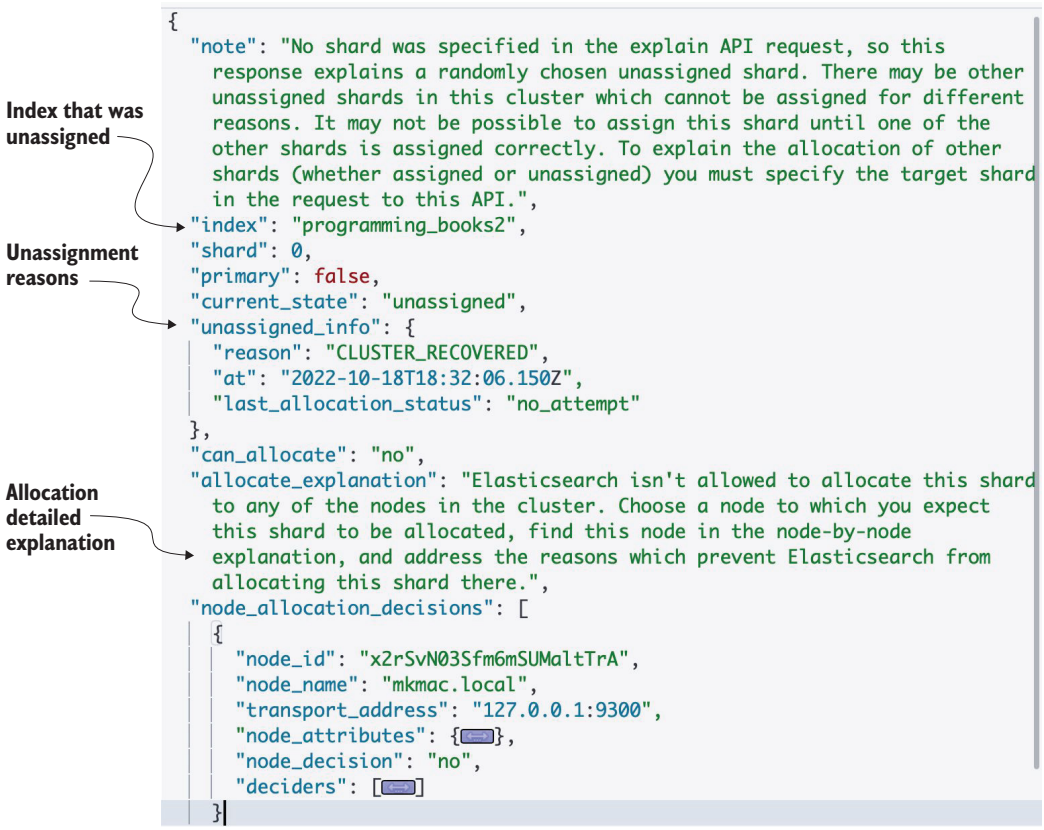


Figure 15.1 Reasons for unassigned shards

for this, and `node_allocation_decisions` contains `deciders` to provide the exact explanation. The following snippet shows these deciders:

```
"deciders": [{
  "decider": "same_shard",
  "decision": "NO",
  "explanation": "a copy of this shard is already
allocated to this node [[programming_books2][0],
     node[x2rSvN03Sfm6mSUMaltTrA],
[P], s[STARTED], a[id=eu1qh4I5THKRmD_7OcmWYw]]"
},
{
  "decider": "disk_threshold",
  "decision": "NO",
  "explanation": "the node is above the low watermark cluster
setting [cluster.routing.allocation.disk.watermark.low=85%],
having less than the minimum required [35gb] free space,
actual free: [24.9gb], actual used: [89.3%]"
}]
```